



INTERFACE	
1	VDD(5V)
2	VSS
3	V0
4	RST
5	E1
6	E2
7	R/W
8	RS
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	LED-K
18	LED-A(5V)

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2017/7/11

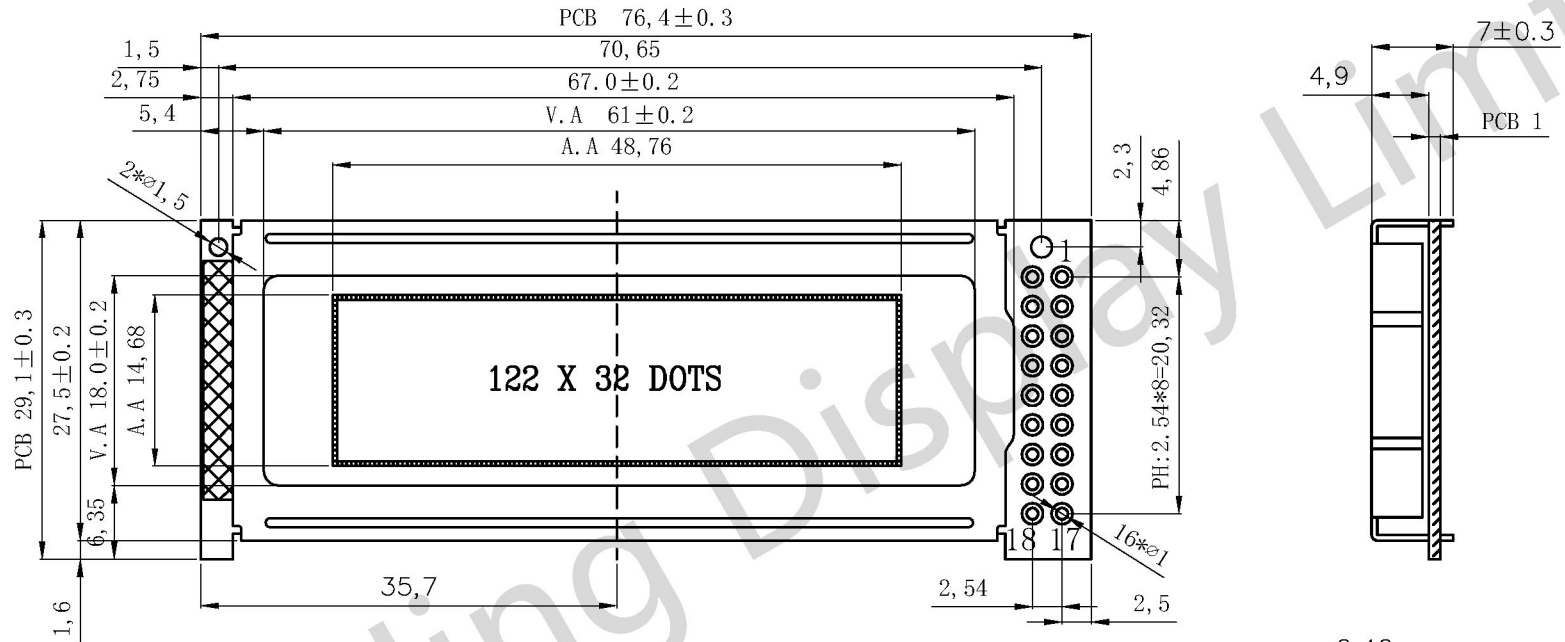

SPECIFICATION:

- 1). STN(BLUE) /POSITIVE/TRANSMISSIVE
- 2). DUTY:1/32. BIAS:1/5. VOP=5.0V
- 3). VIEWING ANGLE: 6 O' CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C  
STORAGE TEMPERATURE: -30~80°C
- 5). BACKLIGHT: WHITE I=40MA
- 6). DRIVE IC: AIP31520
- 7). DRIVE POWER: VDD=5.0V

 <b>深圳市华显晶显示技术有限公司</b> <b>HUA XIAN JING Display Limited</b> www.huaxianjing.com		UNITS: mm		DATE:	MODE NUMBER :	 SHEET: 1 of 1
		UNSPECIFIED TOLERANCE: ±0.20	DESIGN BY: WZQ	DATE: 2017/7/11	MODE NUMBER : HSM12232C-1	
CUSTOM NO:		DO NOT SCALE THIS DRAWING.		PROJECTION		DATE: 2017/7/11