




INTERFACE:	
1	VSS
2	VDD(5V)
3	N.C
4	RS
5	/RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	PSB
16	/RES
17	LED-K
18	LED-A(5V)
19	N.C
20	N.C

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2012-5-14

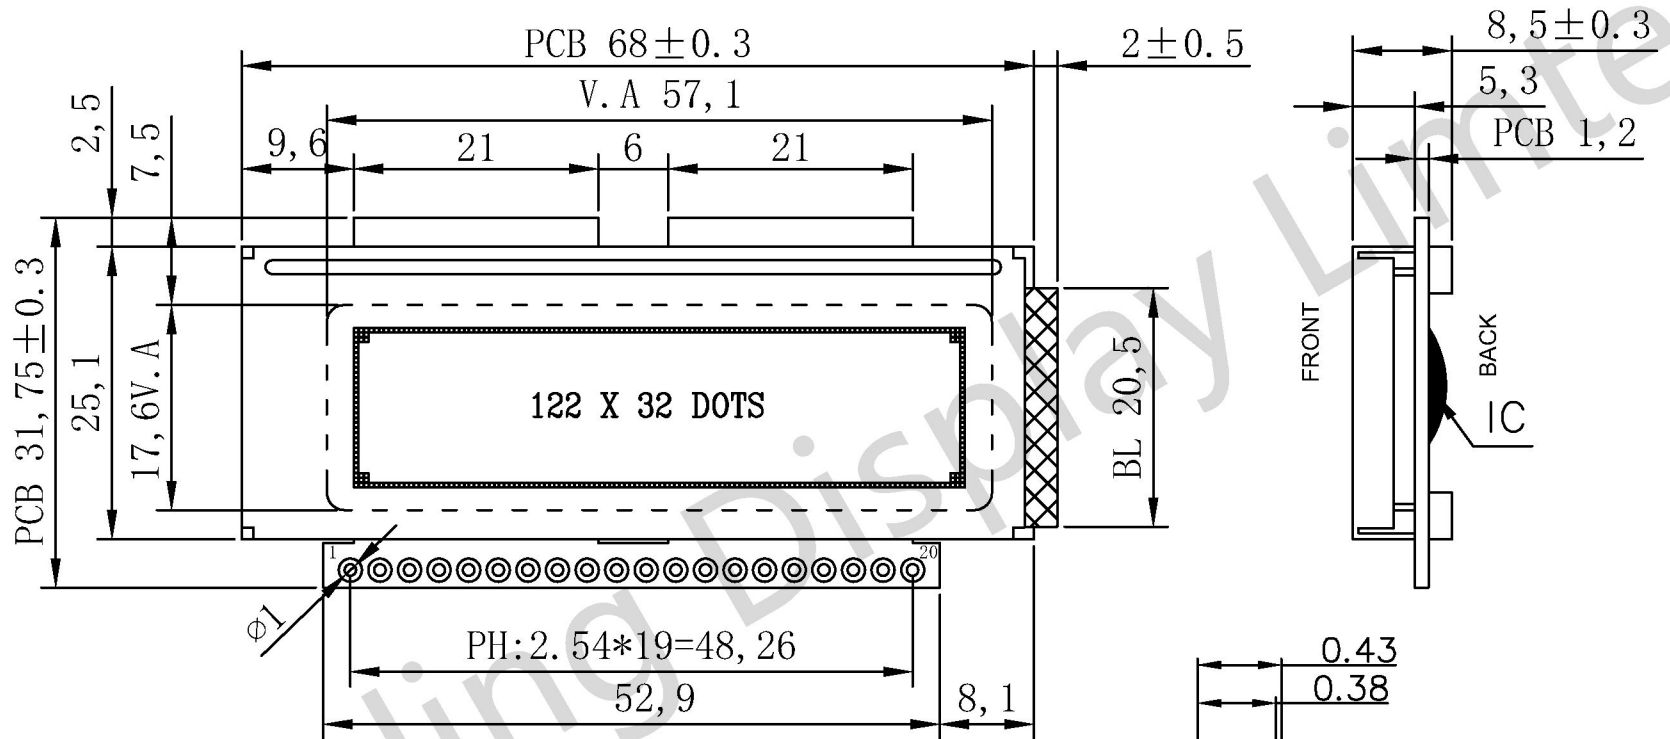

**SPECIFICATION:**

- 1). STN(Y-G) /POSITIVE/TRANSFLECTIVE
- 2). DUTY:1/32. BIAS:1/5. VOP=4.8V
- 3). VIEWING ANGLE: 6 O' CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C  
STORAGE TEMPERATURE: -30~80°C
- 5). BACKLIGHT: **White** I=40MA
- 6). DRIVE IC: ST7920
- 7). DRIVE POWER: VDD=5.0V

 <b>深圳市华显晶显示技术有限公司</b> <b>HUA XIAN JING Display Limited</b> www.huaxianjing.com		UNITS: mm		DATE: 2012/5/14	MODE NUMBER : HSM12232G	 SHEET: 1 of 1 DATE: 2012/5/14
		UNSPECIFIED TOLERANCE: ± 0.20	DESIGN BY: WZQ	CHECKED BY:	CUSTOM NO:	