


INTERFACE	
1	VSS
2	VDD
3	CLK
4	SID
5	CS
6	RST
7	LED-A
8	LED-K

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2011-06-23

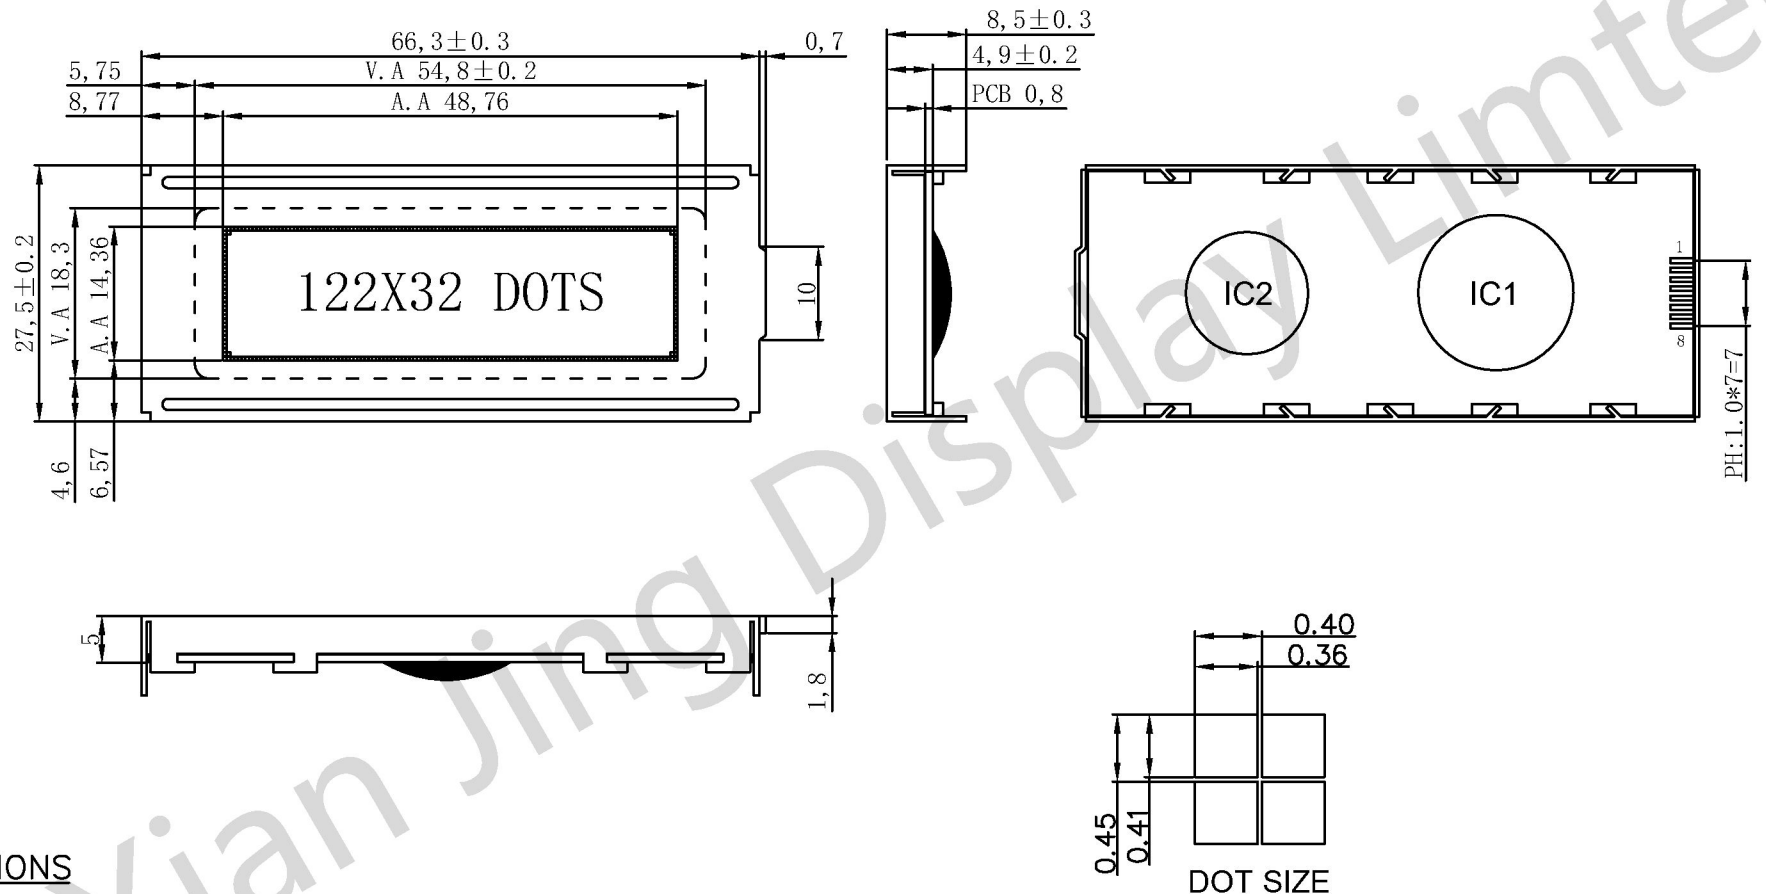

SPECIFICATIONS

STORAGE TEMP : -30°C TO $+80^{\circ}\text{C}$
 OPERATING TEMP : -20°C TO $+70^{\circ}\text{C}$
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/32 DUTY, 1/7 BIAS, VOP=5V
 DISPLAY MODE : STN TRANSMISSIVE NEGATIVE(BLUE)
 BACK LIGHT ITEM: WHITE, I=40mA
 LCM OPERATING VOLTAGE: 5.0V
 CONTROLLER/DRIVER IC: T7920

 深圳市华显晶显示技术有限公司 HUA XIAN JING Display Limited www.huaxianjing.com		UNITS: mm		DATE: 2011/6/23	MODE NUMBER : HSM12232J	 SHEET: 1 of 1 DATE: 2011/6/23
		UNSPECIFIED TOLERANCE: $\pm 0,20$	DESIGN BY: WZQ	CHECKED BY:	CUSTOM NO:	