


IF	SOMBLE
1	FG
2	VSS
3	VDD(5V)
4	V0
5	/WR
6	/RD
7	/CE
8	C/D
9	RST
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	FS
19	LED-A(5V)
20	LED-K

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2011-9-24

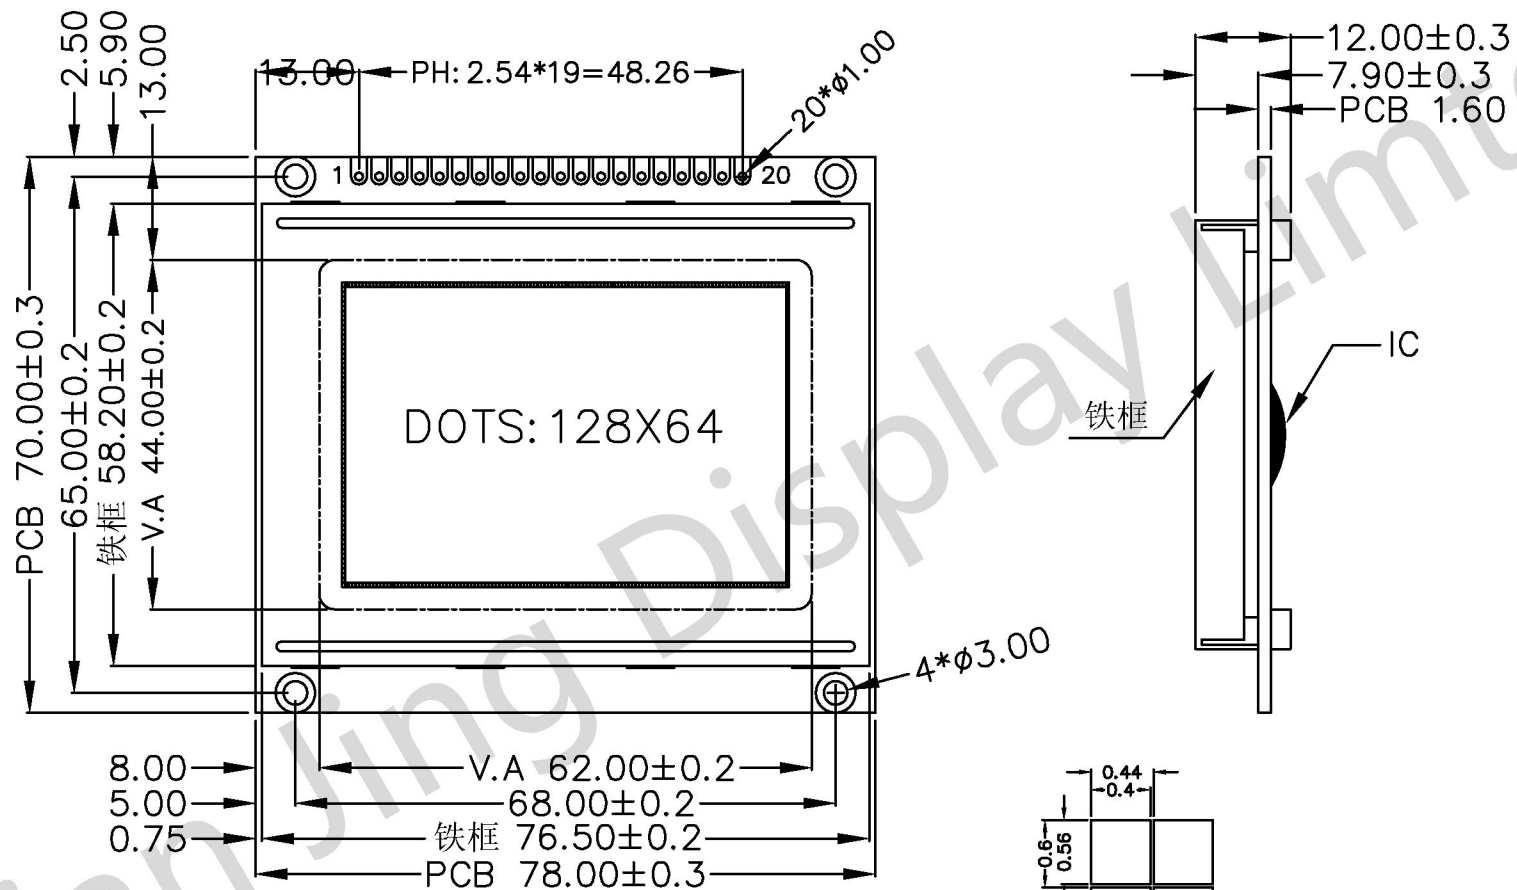

SPECIFICATION:

- 1). STN(Y-G)/POSITIVE/TRANSFLECTIVE
- 2). DUTY:1/64. BIAS:1/9. VOP=9.0V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 6). BACKLIGHT: Y-G I=80MA
- 7). DRIVE IC: 6963

H 深圳市华显晶显示技术有限公司
HUA XIAN JING Display Limited www.huaxianjing.com

Unspecified Tolerance: ±0.20	UNITS: mm	DATE: 2011/9/24	MODE NUMBER: HSM12864F		SHEET: 1 of 1
DESIGN BY: WZQ	CHECKED BY:	CUSTOM NO:	DO NOT SCALE THIS DRAWING.		DATE: 2011/9/24