


INTERFACE	
1	VDD(5V)
2	VSS
3	V0
4	DB0
5	DB1
6	DB2
7	DB3
8	DB4
9	DB5
10	DB6
11	DB7
12	CSA
13	CSB
14	RST
15	R/W
16	RS
17	E
18	VEE
19	LED-A(5V)
20	LED-K

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2012-8-20

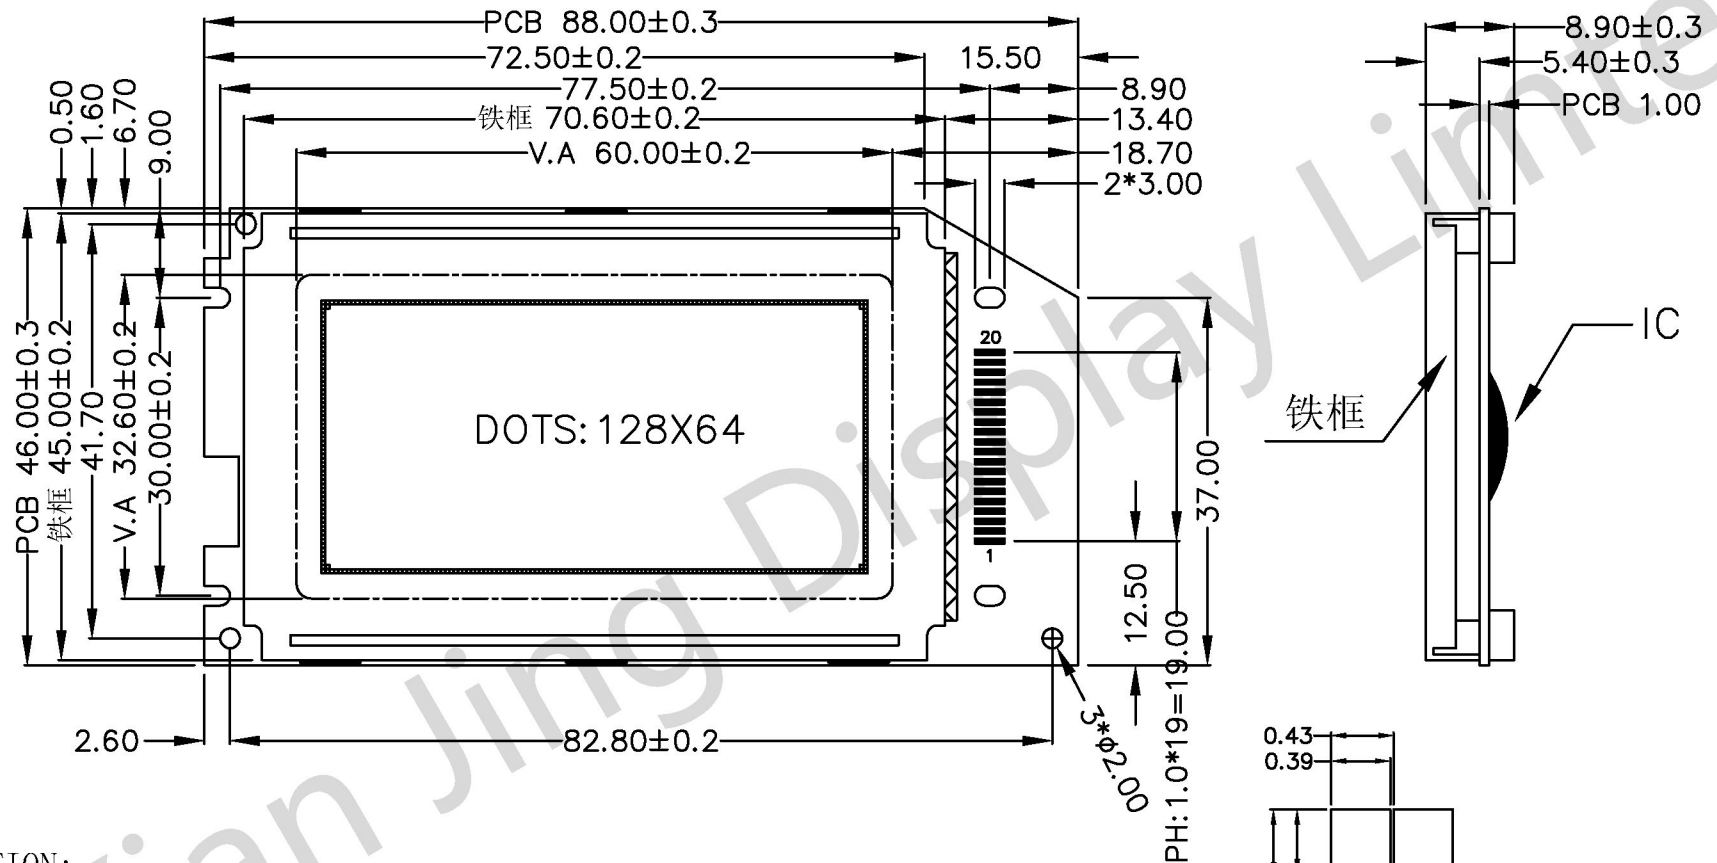

SPECIFICATION:

- 1). STN (BLUE)/NEGATIVE/TRANSMISSIVE
- 2). DUTY:1/64. BIAS:1/9. VOP=10.0V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 6). BACKLIGHT: WHITE I=80MA
- 7). DRIVE IC: 0107, 0108

 深圳市华显晶显示技术有限公司 HUA XIAN JING Display Limited www.huaxianjing.com		MODE NUMBER :			SHEET: 1 of 1
		HSM12864L			
Unspecified Tolerance: ±0.20	UNITS: mm	DATE: 2012/8/20	DO NOT SCALE THIS DRAWING.	PROJECTION	DATE: 2012/8/20