


INTERFACE	
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2011-12-2

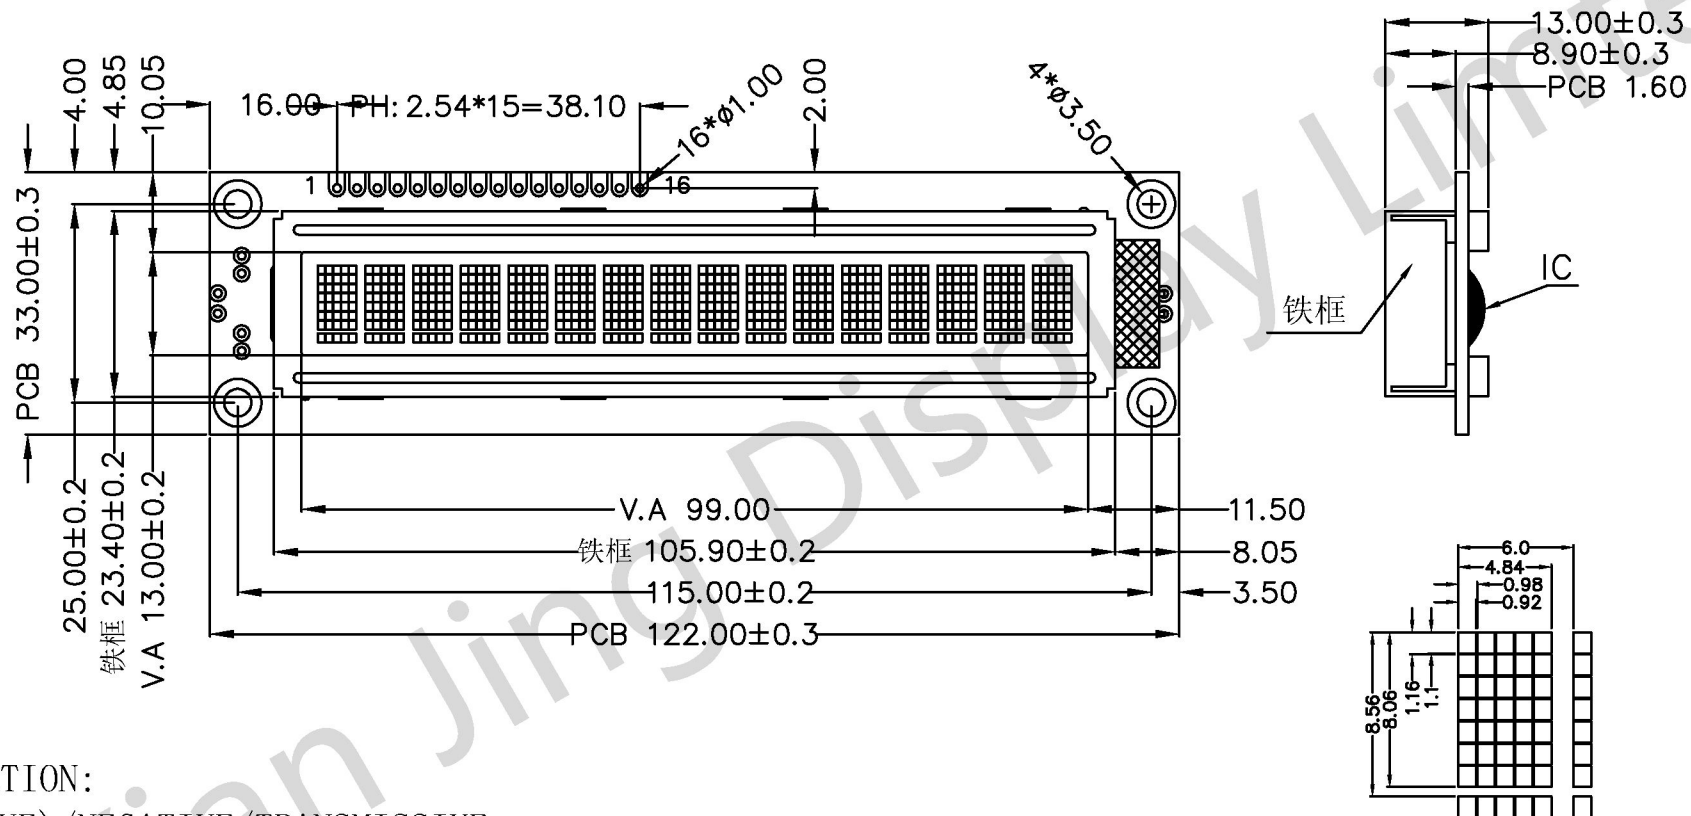

**SPECIFICATION:**


- 1). STN (BLUE) /NEGATIVE/TRANSMISSIVE
- 2). DUTY:1/16. BIAS:1/5. VOP=4.7V
- 3). VIEWING ANGLE: 6 O' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE:  $-20 \sim 70^{\circ}\text{C}$   
STORAGE TEMPERATURE:  $-30 \sim 80^{\circ}\text{C}$
- 6). BACKLIGHT: WHITE I=20MA
- 7). DRIVE IC: AIP31066



深圳市华显晶显示技术有限公司

HUA XIAN JING Display Limited

www.huaxianjing.com

Unspecified Tolerance:	$\pm 0.20$	UNITS: mm	DATE:	MODE NUMBER :		SHEET:	1 Of 1
DESIGN BY:	WZQ	2011/12/2		HSM1601B		DATE:	2011/12/2
CHECKED BY:							
CUSTOM NO:				DO NOT SCALE THIS DRAWING.	PROJECTION		