


INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	/RST
5	RS(CS)
6	R/W(SID)
7	E1
8	E2
9	PSB
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	LED-A(5V)
19	LED-K

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2013-9-9

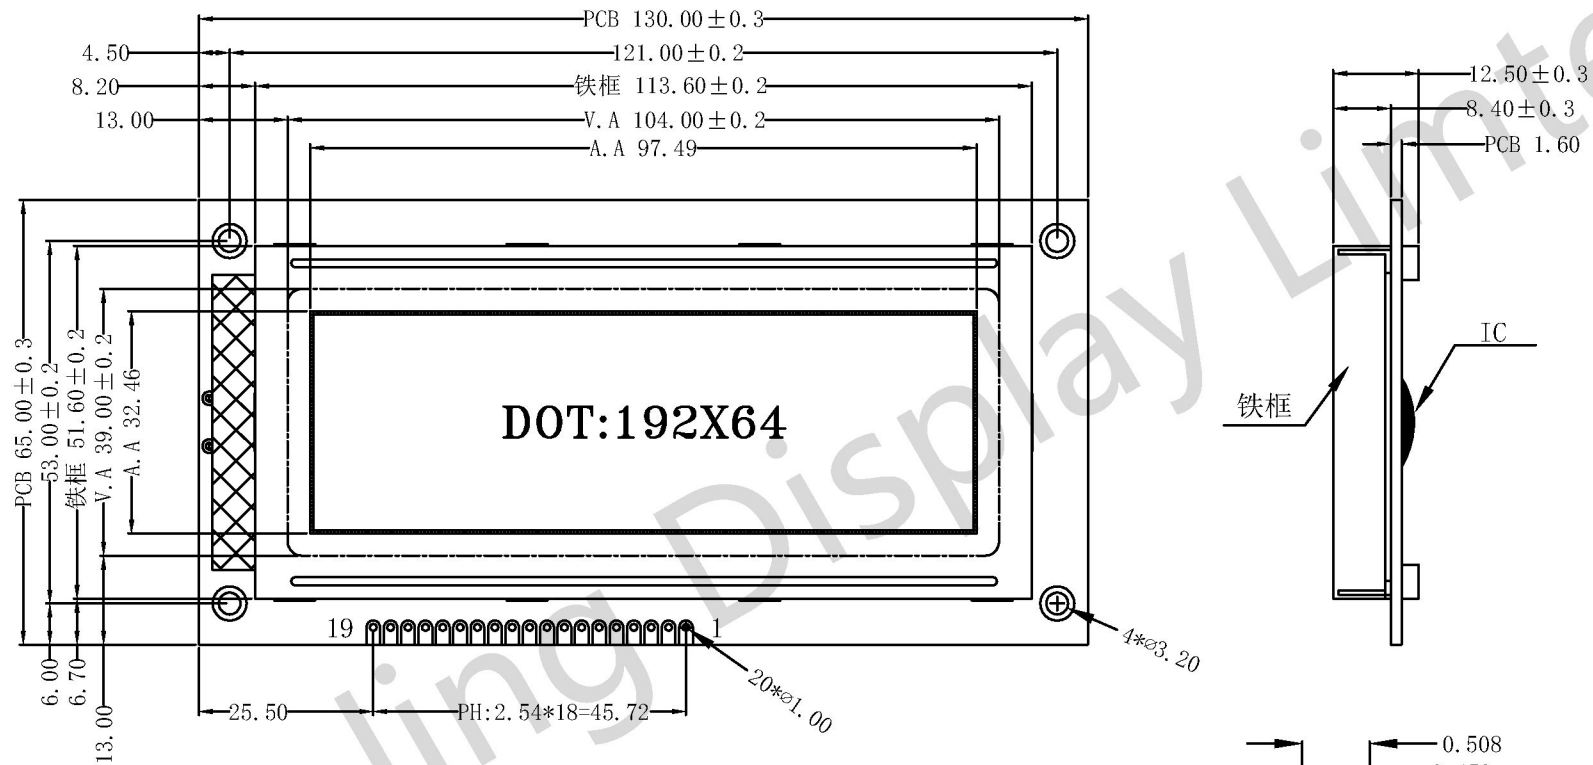

SPECIFICATION:

- 1). STN (BLUE) /NEGATIVE/TRANSMISSIVE
- 2). DUTY:1/32. BIAS:1/6. VOP=5.0V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 6). BACKLIGHT: WHITE I=80MA
- 7). DRIVE IC: ST7920

 深圳市华显晶显示技术有限公司 HUA XIAN JING Display Limited www.huaxianjing.com		MODE NUMBER :			SHEET: 1 of 1
		HSM19264M			
Unspecified Tolerance: ± 0.20	UNITS: mm	DATE: 2013/9/9	DO NOT SCALE THIS DRAWING.	PROJECTION	DATE: 2013/9/9