


INTERFACE	
1	DB7
2	DB6
3	DB5
4	DB4
5	DB3
6	DB2
7	DB1
8	DB0
9	E
10	R/W
11	RS
12	V0
13	VDD(5V)
14	VSS
15	CSA
16	CSB
17	VEE
18	RST
19	LED-A(5V)
20	LED-K

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2011-11-12

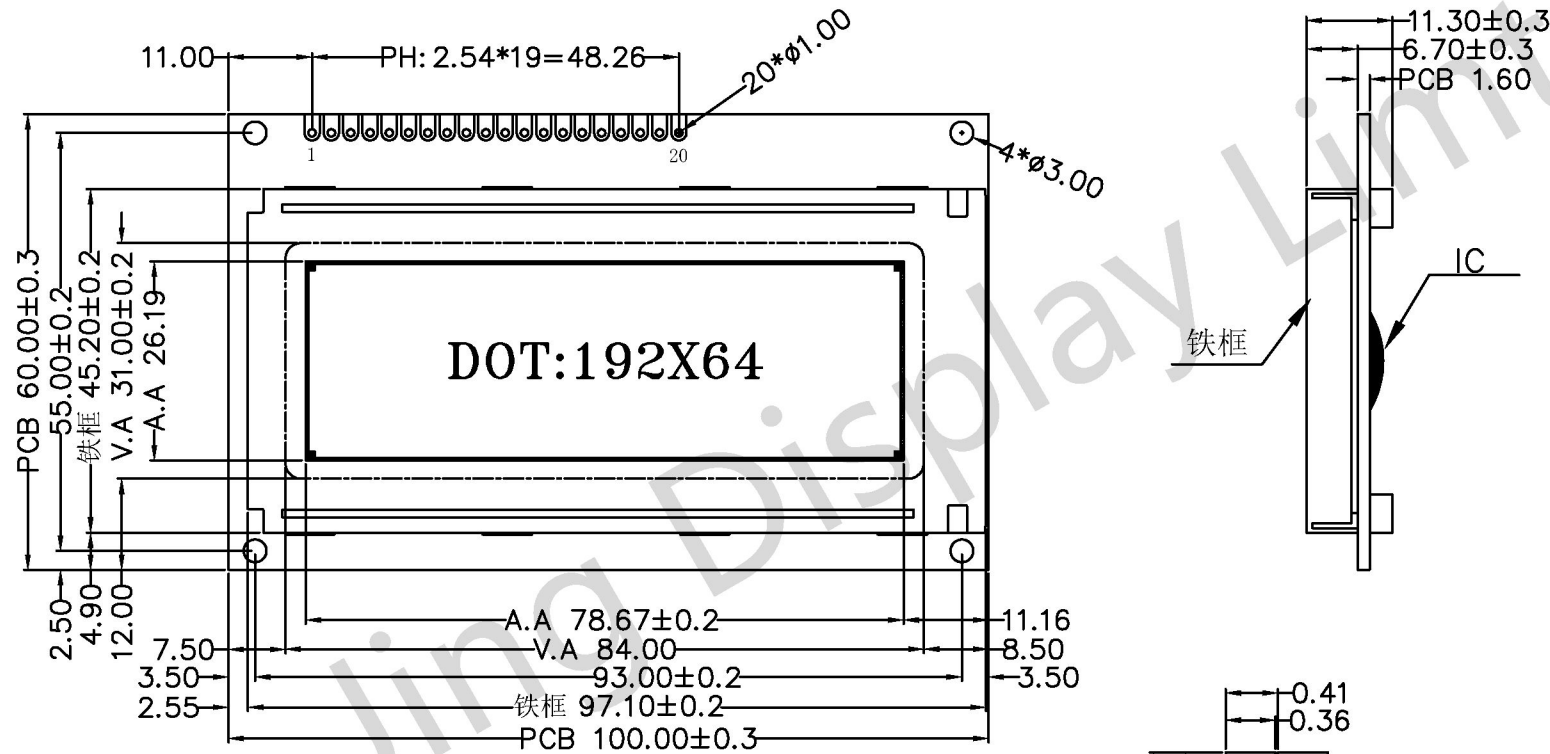

SPECIFICATION:

- 1). STN (BLUE) /NEGATIVE/TRANSMISSIVE
- 2). DUTY:1/64. BIAS:1/9. VOP=12.5V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 6). BACKLIGHT: WHITE I=80MA

 深圳市华显晶显示技术有限公司 HUA XIAN JING Display Limited www.huaxianjing.com		MODE NUMBER :			SHEET:	1 Of 1	
		DESIGN BY: WZQ			DATE: 2011/11/12		HSM19264T
UNSPECIFIED TOLERANCE: ±0.20		UNITS: mm	DATE:	DO NOT SCALE THIS DRAWING.		PROJECTION	DATE: 2011/11/12