



| INTERFACE | |
|-----------|-----------|
| 1 | VSS |
| 2 | VDD(5V) |
| 3 | V0 |
| 4 | RS |
| 5 | RW |
| 6 | E |
| 7 | DB0 |
| 8 | DB1 |
| 9 | DB2 |
| 10 | DB3 |
| 11 | DB4 |
| 12 | DB5 |
| 13 | DB6 |
| 14 | DB7 |
| 15 | LED-A(5V) |
| 16 | LED-K |



| VER | DETIAL DISCRIPTION | DATE |
|-----|--------------------|------------|
| 00 | FIRST ISSUE | 2013/11/11 |

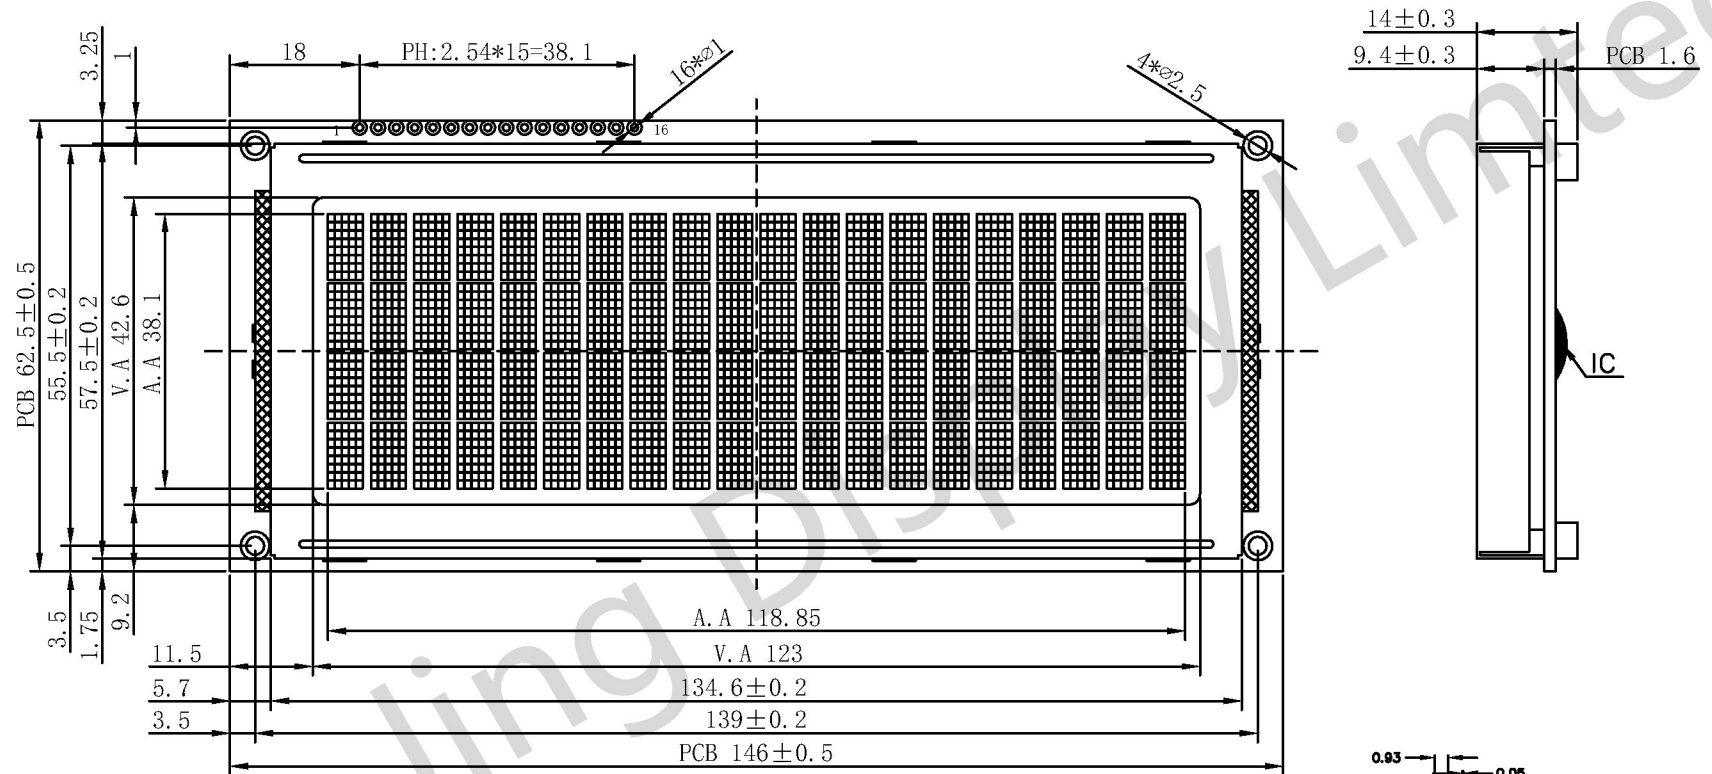

DOT SIZE:

SPECIFICATION:

- 1). STN (BLUE) /NEGATIVE/TRANSMISSIVE
- 2). DUTY:1/16. BIAS:1/5. VOP=4.7V
- 3). VIEWING ANGLE: 6 O' CLOCK
- 4). OPERATING TEMPERATURE: -10~60°C
STORAGE TEMPERATURE: -20~70°C
- 5). BACKLIGHT: WHITE I=120MA
- 6). DRIVE POWER: VDD=5.0V

| | | | | | | |
|---|--|------------------------------|----------------|----------------------------|---------------|---|
|  深圳市华显晶显示技术有限公司 HUA XIAN JING Display Limited www.huaxianjing.com | | UNITS: mm | | DATE: | MODE NUMBER : |  SHEET: 1 Of 1 |
| | | UNspecified Tolerance: ±0.20 | DESIGN BY: WZQ | 2013/11/11 | HSM2004E | |
| CHECKED BY: | | | | DO NOT SCALE THIS DRAWING. | PROJECTION | DATE: 2013/11/11 |
| CUSTOM NO: | | | | | | |