


INTERFACE:	
1	FG
2	VSS
3	VCC(5V)
4	V0
5	WR
6	RD
7	CS
8	C/D
9	RST
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	FS
19	VEE
20	LED+(5V)

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2011-11-30

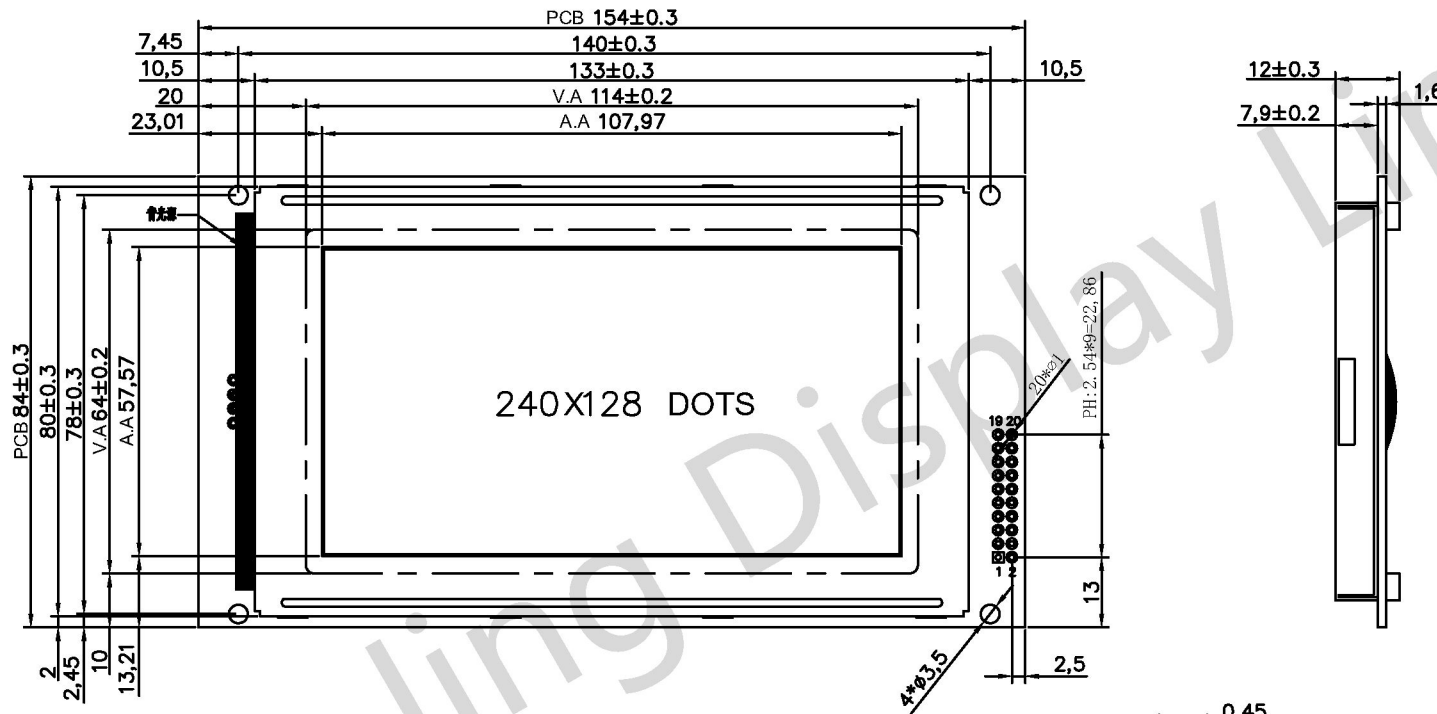

### SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C  
 OPERATING TEMP : -20°C TO +70°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/128 DUTY, 1/12 BIAS, VOP=18V  
 DISPLAY MODE : STN TRANSFLECTIVE POSITIVE(Y-G)  
 BACK LIGHT ITEM: Y-G, I=120mA  
 LCM OPERATING VOLTAGE 5.0V  
 CONTROLLER/DRIVER IC: 6963+Bonding IC

 <b>深圳市华显晶显示技术有限公司</b> <b>HUA XIAN JING Display Limited</b> www.huaxianjing.com		UNITS: mm		DATE: 2011/11/30	MODE NUMBER : HSM240128E	 SHEET: 1 of 1 DATE: 2011/11/30
		UNSPECIFIED TOLERANCE: ± 0.20	DESIGN BY: WZQ	CHECKED BY:	CUSTOM NO:	