



INTERFACE:	
1	VSS
2	VCC(5V)
3	V0
4	/WR
5	/RD
6	/CS
7	A0
8	/RST
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	LEDA
18	VEE
19	LEDA
20	LEDK

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2012-11-10

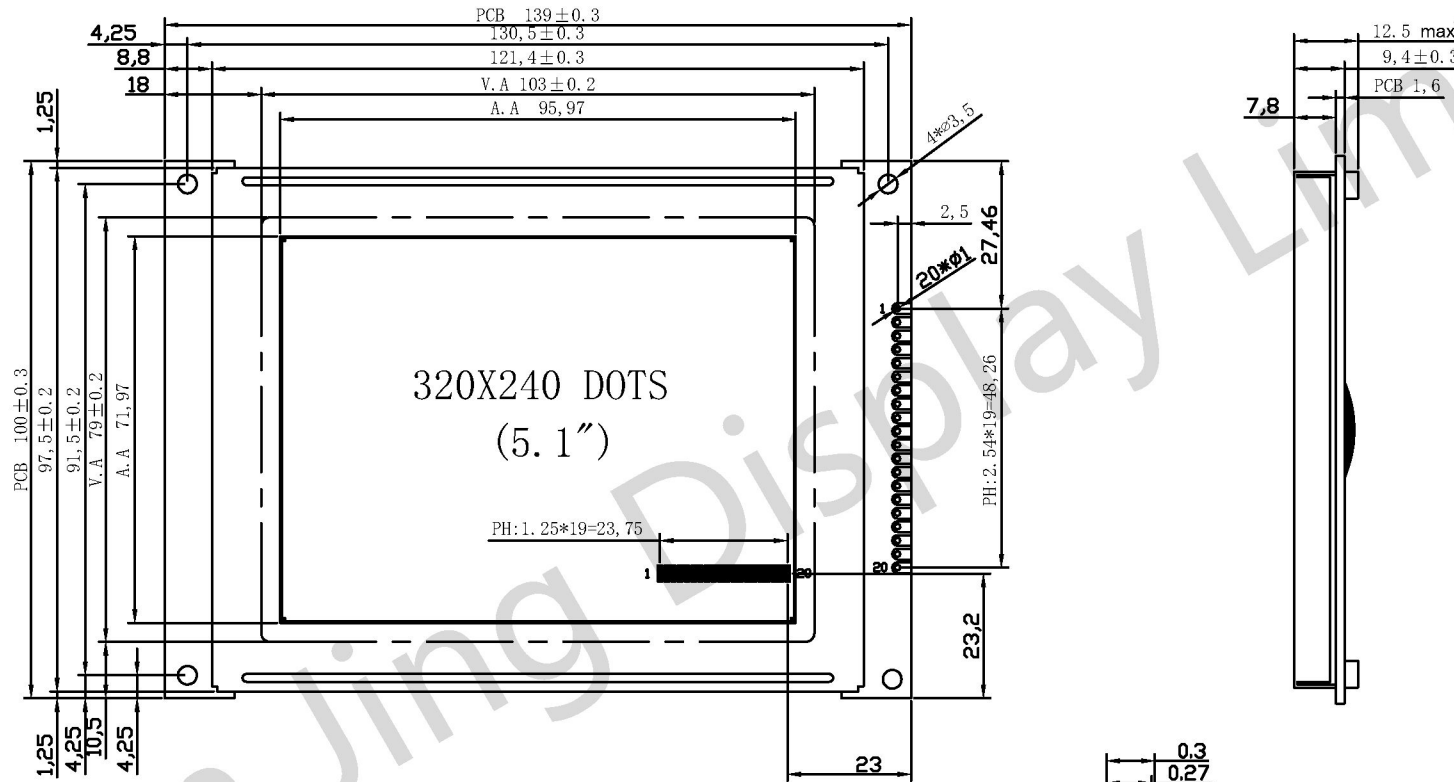

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/240DUTY, 1/16 BIAS,VOP=25V
 DISPLAY MODE : STN TRANSMISSIVE NEGATIVE(BLUE)
 BACK LIGHT ITEM: WHITE I=160mA
 LCM OPERATING VOLTAGE5.0V
 CONTROLLER/DRIVER IC:RA8835



 深圳市华显晶显示技术有限公司 HUA XIAN JING Display Limited www.huaxianjing.com		UNSPECIFIED TOLERANCE: ± 0.20		UNITS: mm	DATE: 2012/11/10	MODE NUMBER : HSM320240C	 SHEET: 1 of 1 DATE: 2012/11/10
		DESIGN BY: WZQ	DO NOT SCALE THIS DRAWING.		PROJECTION		