RoHS ???????? REACH

正视图 侧视图 背视图

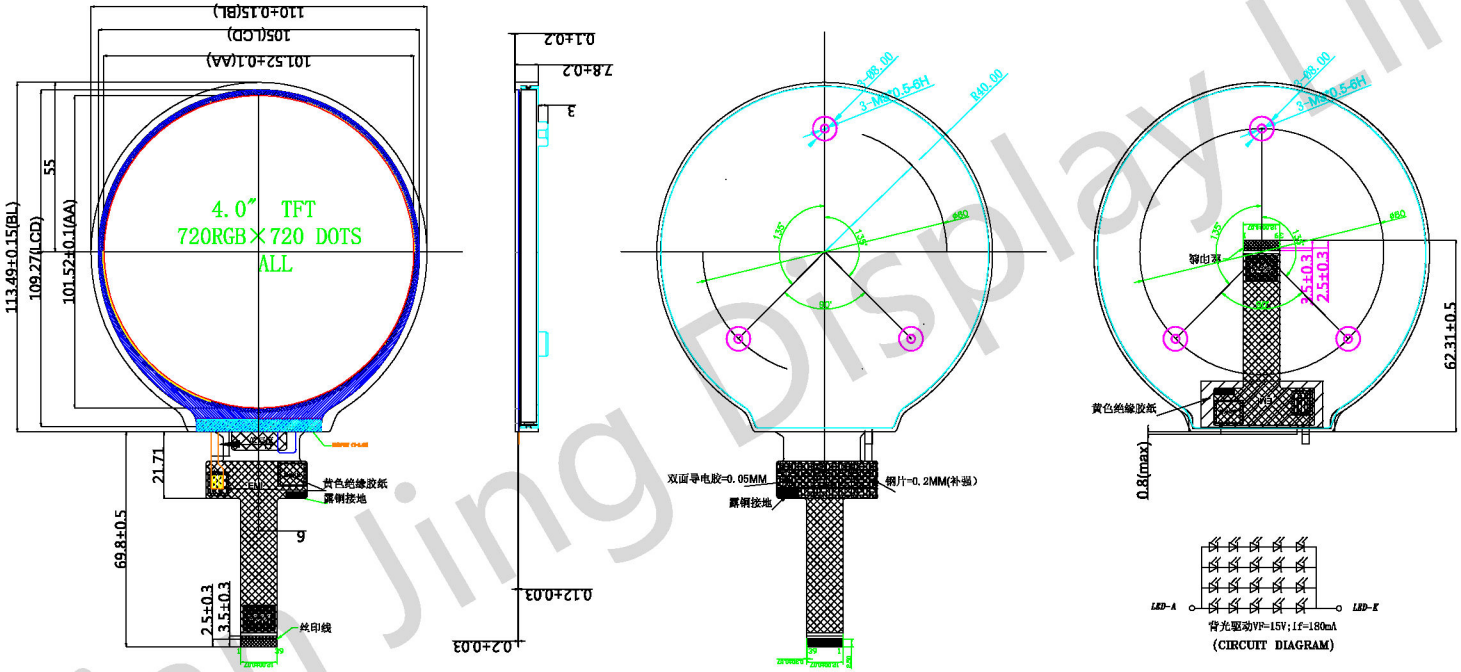

PIN DEFINATION

1	GND
2	LEDA
3	LEDA
4	LEDK
5	LEDK
6	GND
7	VDD(-6.3V)
8	VDD(-6.3V)
9	GND
10	VDD(+6.3V)
11	VDD(+6.3V)
12	GND
13	IOVCC(1.8V)
14	IOVCC(1.8V)
15	GND
16	RESET
17	GND
18	TE
19	GND
20	NC
21	NC
22	NC
23	GND
24	LAN2_P
25	NC
26	LAN2_N
27	GND
28	CLK_P
29	NC
30	CLK_N
31	GND
32	LAN1_P
33	NC
34	LAN1_N
35	GND
36	LAN0_P
37	NC
38	LAN0_N
39	GND

NOTE:
1. DISPLAY MODE :4.0 IPS ,16.7M COLOR STRANSMISSIVE, NORMALLY BALCK
2. Driver IC:ICNL9707
3. Viewing Direction:ALL O'Clock
4. Operating Temperature: -30° - +80°
5. Storage Temperature: -30° - +80°
6. Backlight Type: 20 White LEDS,5串4并
7. BL Input Current: 180 mA
8. LCM Brightness: 800 cd/m MIN

如果客户做全贴合，考虑到LCM材料公差，LCM组装公差，CTP贴 合公差，CTP丝印公差，建议CTP的丝印开窗在屏AA区单边外扩0.2MM.
标示"*"的尺寸为重点管控尺寸
未注尺寸公差:±0.2

REV	DESCRIPTION	DATE
1	RELEASE FOR SAMPLES	2022.04.20
2		
3		

HUA XIAN JING Display Limited
www.huaxianjing.com

MODEL NO.	TFT040B015	TITLE	SCALE 1:1	UNIT : mm
CUST.REF NO.		LCM	SHEET 1/1	Version: 1
DRAWN BY		DATE		PRO.(3):
CHECKED BY		DATE		
APPROVE BY		DATE		

Hua Xian Jing Display Limited