
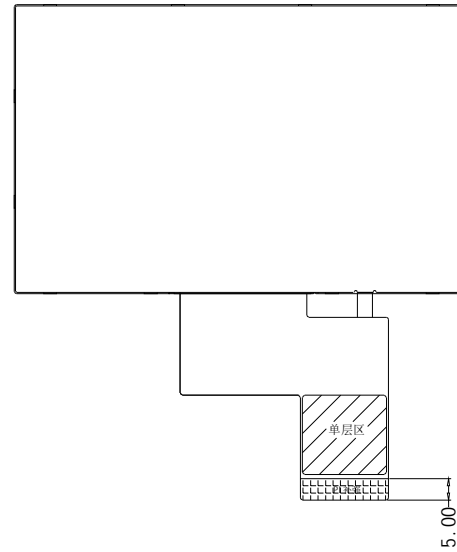
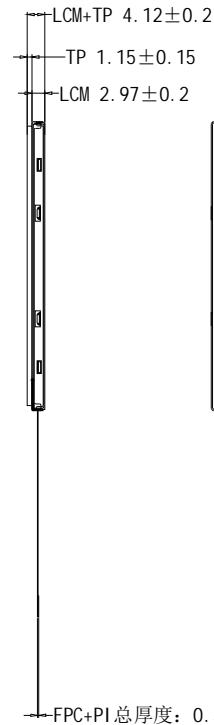


- 说明:
1. 结构: FILM+GLASS+tail
 上线 FILM: 雾面防牛 (0.188mm)
 下线 GLASS: 400Ω/□ 普通0.7mm
 tail: FPC (pitch=1.3mm)
 2. 电路等级: DC5V 35mA
 3. 绝缘阻抗: ≥20MΩ (25V DC)
 4. 线性: ≤1.5%
 5. 透光率: ≥80%
 6. 操作压力: 80g
 7. 打点寿命: ≥1,000,000次
 8. 工作环境: -10℃~+60℃
 储存环境: -20℃~+70℃
 9. X阻抗: 500-950Ω
 Y阻抗: 160-330Ω
 10. 响应时间: <10ms
 11. 未注尺寸公差按±0.20

- 技术要求:
1. 带*尺寸为重点尺寸, 带()尺寸为参考尺寸
 2. LCD切割断面崩边≤1/3 (单层LCD厚度)
 3. 平面翘曲度≤0.35mm
 4. 符合RoHS指令
 5. 工作温度: -20℃~70℃
 6. 储存温度: -30℃~80℃
 7. 建议TP V.A开窗比LCD A.A单边大0.4mm
 8. 泡棉开窗比LCD A.A单边大0.3mm



1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	R1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DEN
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

LCD型号/类型/分辨率	4.3/1PS/480*272
视角方向	ALL
偏光片	上磨0° /下光90°
驱动IC	NV3047
LED颗数/连接方式/电流	10-LED/5串2并/40mA
背光底色要求	

PART DESCRIPTION	LCM		HUA XIAN JING Display Limited www.huaxianjing.com				
DESIGNED			UNIT mm	SCALE 1.00	3rd ANGLE	SIZE A4	SHEET NUMBER 1 of 1
CHECKED			PART NUMBER				DRAWING REV. A
APPROVED			MODEL NAME TFT043BT005				PART NUMBER VER. N/A

REV	SIGN	DESCRIPTION	PIC	DATE
A		首次发行	xw	2022.3.5