



1 2 3 4 5

B  
C  
D

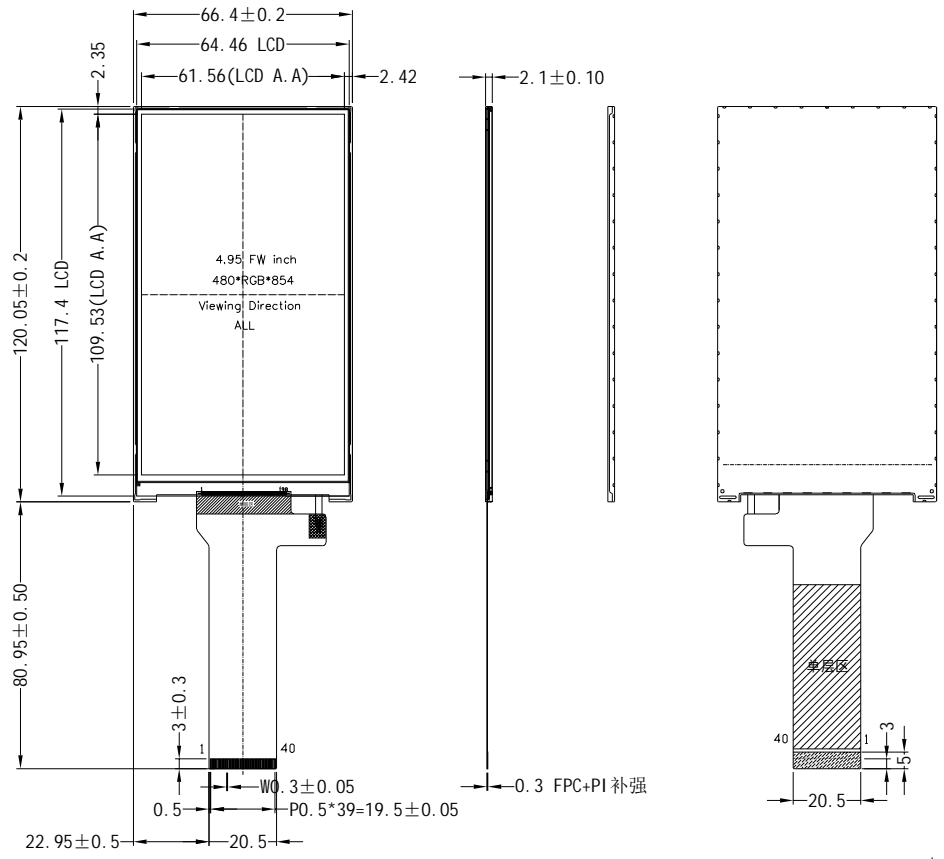

PIN	SYMBLE
1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	GND
11	GND
12	GND
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	GND
20	GND
21	B0
22	B1
23	B2
24	B3
25	B4
26	GND
27	GND
28	GND
29	GND
30	CLK
31	NC
32	HSYNC
33	VSYNC
34	DEN
35	NC
36	GND
37	RESET
38	SDI
39	SCL
40	CS

LCD型号/类型/分辨率	BOE4.95/1PS/480*854
视角方向	ALL
偏光片	上细砂0° / 下光90°
驱动IC	ST7701S
LED颗数/连接方式/电流	12 LED/6串两并/40mA
背光要求	

- 技术要求:
- 带\*尺寸为重点尺寸, 带()尺寸为参考尺寸
  - LCD切割断面崩边≤1/3 (单层LCD厚度)
  - 平面翘曲度≤0.35mm
  - 符合RoHS指令
  - 工作温度: -20℃~70℃
  - 储存温度: -30℃~80℃
  - 建议TP V. A开窗比LCD A. A单边大0.4mm
  - 泡棉开窗比LCD A. A单边大0.3mm

REV	SIGN	DESCRIPTION	PIC	DATE
A		首次发行	KZH	2023.08.31

PART DESCRIPTION	LCM		HUA XIAN JING Display Limited www.huaxianjing.com			
DESIGNED			UNIT mm	SCALE 1.00	3rd ANGLE	SHEET NUMBER 1 of 1
CHECKED			PART NUMBER			DRAWING REV. A
APPROVED			MODEL NAME	TFT050B097		PART NUMBER VER. N/A

2 3 4 5