
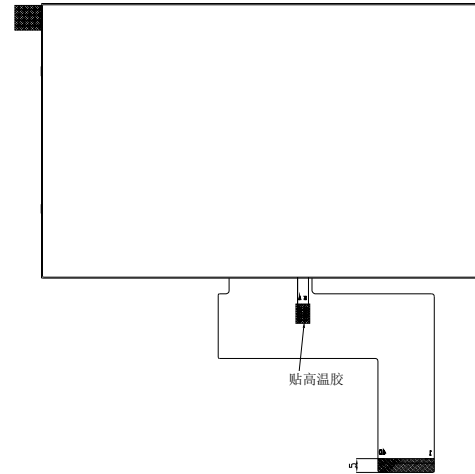
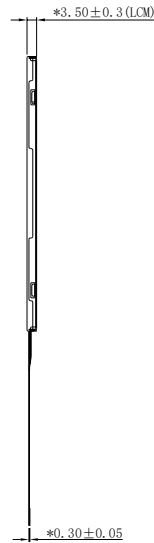




正视图

侧视图


背视图

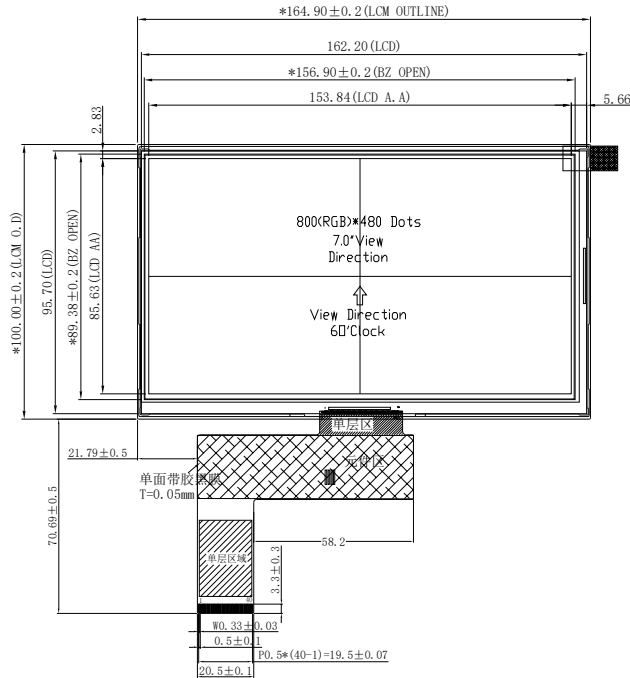

PIN	SYMBLK
1	LEDK
2	LEDA
3	GND
4	VDD
5	RO
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU



VF=9V, IF=180MA



PIN	OUT
1	Y+
2	X-
3	Y-
4	X+

说明:

1. 结构: film+glass+FPC  
film: 亮面防牛 (0.188mm)  
glass: 500Ω/□ (1.1mm)  
tail: FPC (pitch=1.0mm)  
总厚度: 1.4±0.10mm
2. 工作电压: 5.0V
3. 电路等级: DC5V 1mA
4. 绝缘阻抗: ≥20MΩ (25V DC)
5. 线性: ≤1.5%
6. 透光率: ≥80%
7. 操作压力: 10~100g
8. 使用寿命: ≥1,000,000次
9. 工作环境: -10℃~+60℃, ≤90%RH
10. 储存环境: -20℃~+70℃, ≤90%RH
11. 未注尺寸公差按±0.20

NOTES:

1. DISPLAY TYPE: 7.0 INCH BOE Panel /WHITE
2. BACKLIGHT: 27 CHIP WHITE LED, IN PARALLEL
3. OPERATING TEMP: -20° C~+70° C
4. STORAGE TEMP: -30° c~+80° c
5. RESOLUTION: 800RGBx480
6. LCD IC: Source IC: EK9716BD4+Gate IC: EK73002AB2
7. Luminous intensity(9 AVG): Module: --- (TYP.)
8. Uniformity: 75%(Min)
9. "( )"reference dimension. " \* "critical dimension
10. RoHS Compliant

PART DESCRIPTION	LCM		HUA XIAN JING Display Limited www.huaxianjing.com				
DESIGNED			UNIT mm	SCALE 1.00	3rd ANGLE	SIZE A4	SHEET NUMBER 1 of 1
CHECKED			PART NUMBER				DRAWING REV. A
APPROVED			MODEL NAME	TFT070B005		PART NUMBER VER. N/A	

REV	SIGN	DESCRIPTION	PIC	DATE
		修改RTP, FPC焊盘位置	KZH	22/7/20
A	△	首次发行	XW	22/5/12