
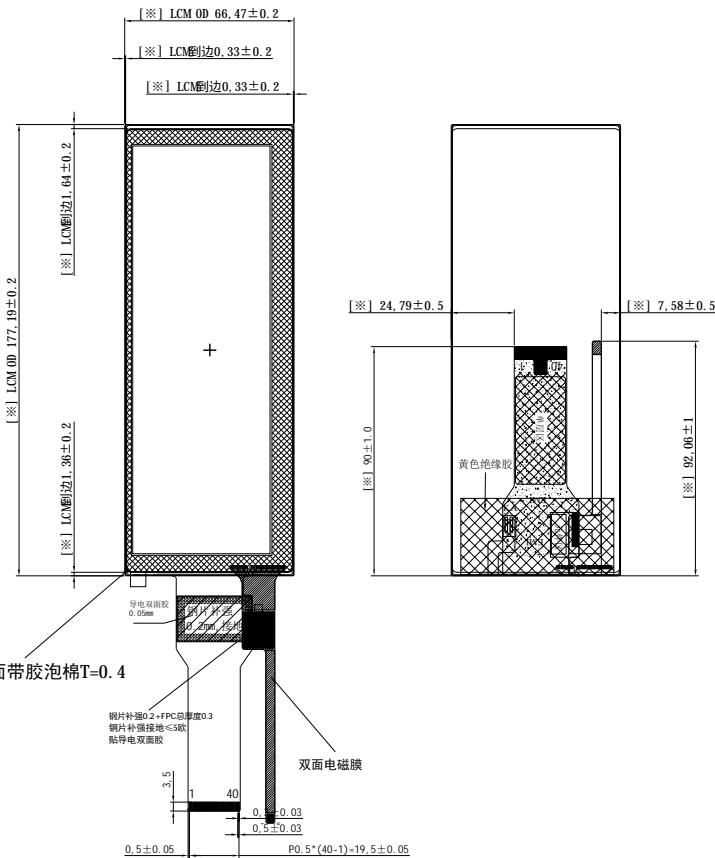
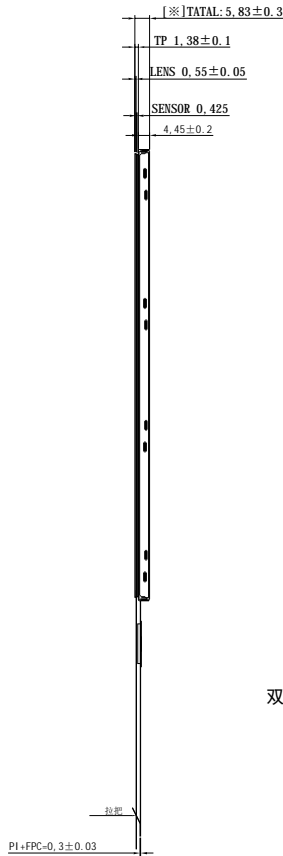


1	2	3	4	5	6
客户确认 (修改意见)	版本		修改日期	修改人	修改内容
	V02				
	V03				

正视图

侧视图

背视图

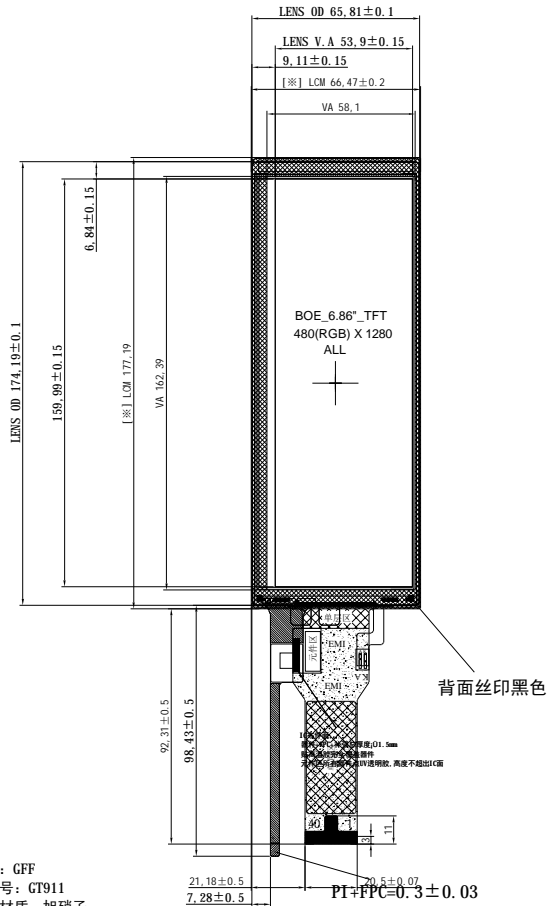

PIN	DESCRIPTION
1	GND
2	D0P
3	D0N
4	GND
5	D1P
6	D1N
7	GND
8	CLKP
9	CLKN
10	GND
11	D2P
12	D2N
13	GND
14	D3P
15	D3N
16	GND
17	GND
18	IOVCC(3.3V)
19	IOVCC(3.3V)
20	NC
21	ID1
22	ID2
23	NC
24	RSTB
25	GND
26	NC
27	GND
28	K
29	K
30	GND
31	NC
32	GND
33	GND
34	NC
35	A
36	A
37	GND
38	VDD-3V3
39	VDD-3V3
40	NC

TP PIN定义

Pin#	Assignment
1	SCL_3.3V
2	SDA_3.3V
3	VDD_3.3V
4	TP_RST
5	TP_INT
6	GND

- 注明:
1. 结构: GFF
 2. IC型号: CT911
 3. 玻璃材质: 旭硝子
 4. 透过率: ≥85%
 5. 工作温湿度范围: -20°C~60°C;
储存温湿度范围: -30°C~70°C;
 6. 表面硬度: ≥6H(750gf)CS≥450, DOL≥8
钢球冲击: 64g, 20cm中心点三次无破损
 7. LENS达因值≥32, 达因笔品牌Arcotest
 8. 未标注公差: ±0.20, 贴合角度±1°
 9. 所有的材料符合ROHS标准
 10. [※]为重点尺寸:

HUA XIAN JING Display Limited		www.huaxianjing.com	
DRAWN BY: (绘图):	TITLE: (产品编号):	TFT667BT021	VIEW (投影方式):
CHECKED BY: (审核):	CUSTOMER ID: (客户编号):		
APPROVED BY: (批准):	DATE: (日期):	2023.11.28	UNIT: (单位):
Standard tolerance: (标准公差):	VERSION NUMBER: (版本号):		mm
			SCALE: (比例):
			1:1