

All Pages Of This Edition Approved

Signature:

Date:

REV.

DESCRIPTION



DATE

AO

新出图

2012/6/8

| PIN | SYMBOL   |
|-----|----------|
| 1   | VSS      |
| 2   | VDD(+5V) |
| 3   | V0       |
| 4   | R/S      |
| 5   | R/W      |
| 6   | E        |
| 7   | DB0      |
| 8   | DB1      |
| 9   | DB2      |
| 10  | DB3      |
| 11  | DB4      |
| 12  | DB5      |
| 13  | DB6      |
| 14  | DB7      |
| 15  | A(5V)    |
| 16  | K        |

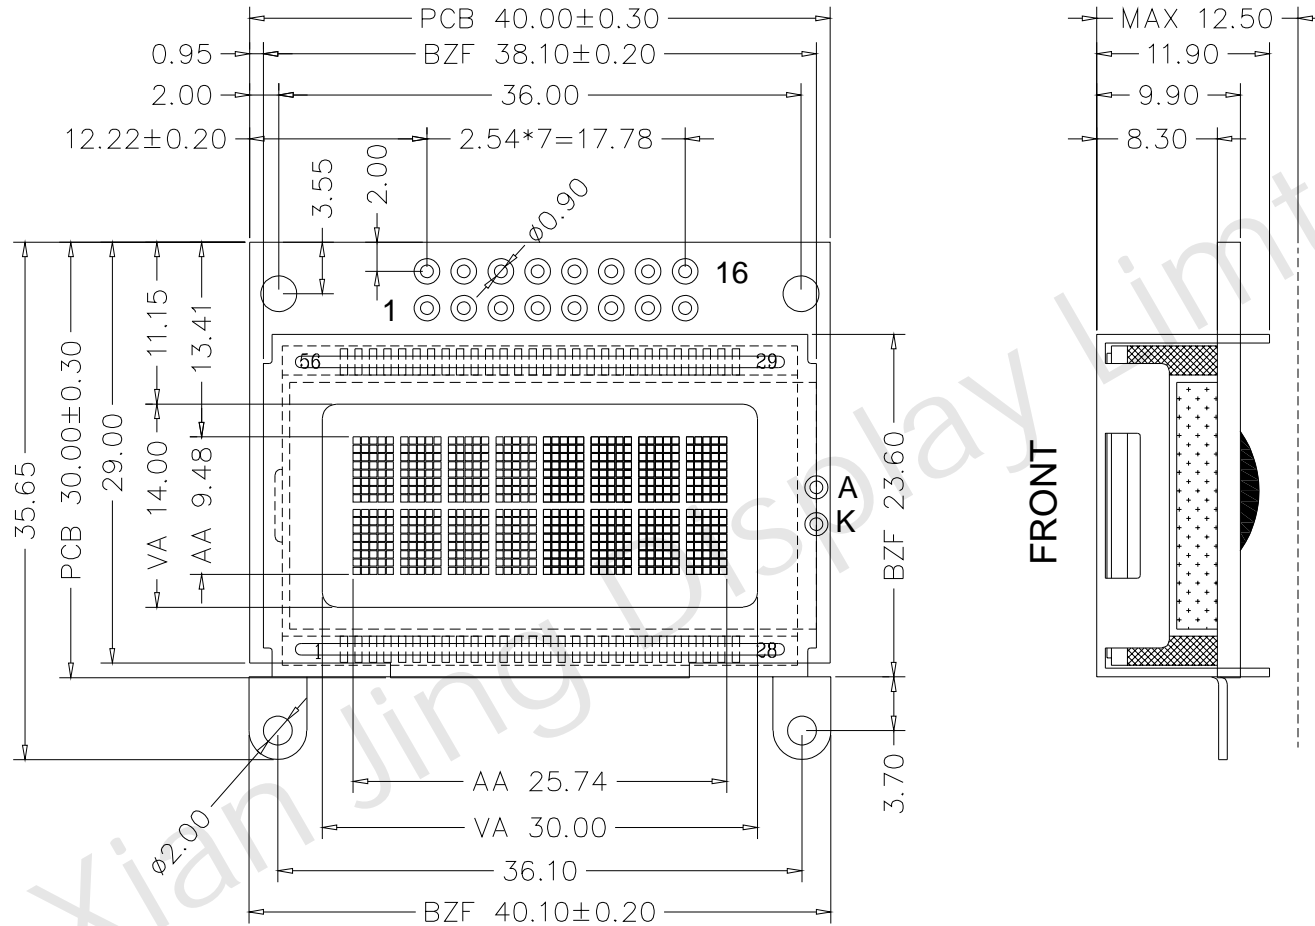

SCALE: 1.6 : 1

VIEWING DIRECTION

Specifications:

1. Display Mode: STN/Yellow-Green/Transflective/Positive.
2. Viewing Angle: 6 O'clock.
3. Drive Method: 1/16Duty 1/5 Bias, Vop=5.0V
4. Top: -20°C~+70°C, Tst: -30°C~+80°C.
5. Connector: PIN.
6. Backlight: Yellow-Green.
7. Drive IC: SPLC780D1-001A
8. RoHS Compliant: Yes.
9. With " \* " Mark Dimensions Are Important Dimensions.



深圳市华显晶显示技术有限公司

HUA XIAN JING Display Limited

www.huaxianjing.com

|                        |           |           |       |               |                            |            |          |
|------------------------|-----------|-----------|-------|---------------|----------------------------|------------|----------|
| Unspecified Tolerance: | ±0.20     | UNITS: mm | DATE: | MODE NUMBER : |                            | SHEET:     | 1 Of 2   |
| DESIGN BY:             | luojinwei | 2012/6/8  |       | HSM0802C-1    |                            | DATE:      | 2012/6/8 |
| CHECKED BY:            |           |           |       |               | DO NOT SCALE THIS DRAWING. | PROJECTION |          |