


INTERFACE	
1	VDD(5V)
2	VSS
3	V0
4	RST
5	E1
6	E2
7	R/W
8	RS
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	LED-A(5V)
18	LED-K

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2013/7/11
01	增大PCB宽度, 固定铁框	2014/11/15

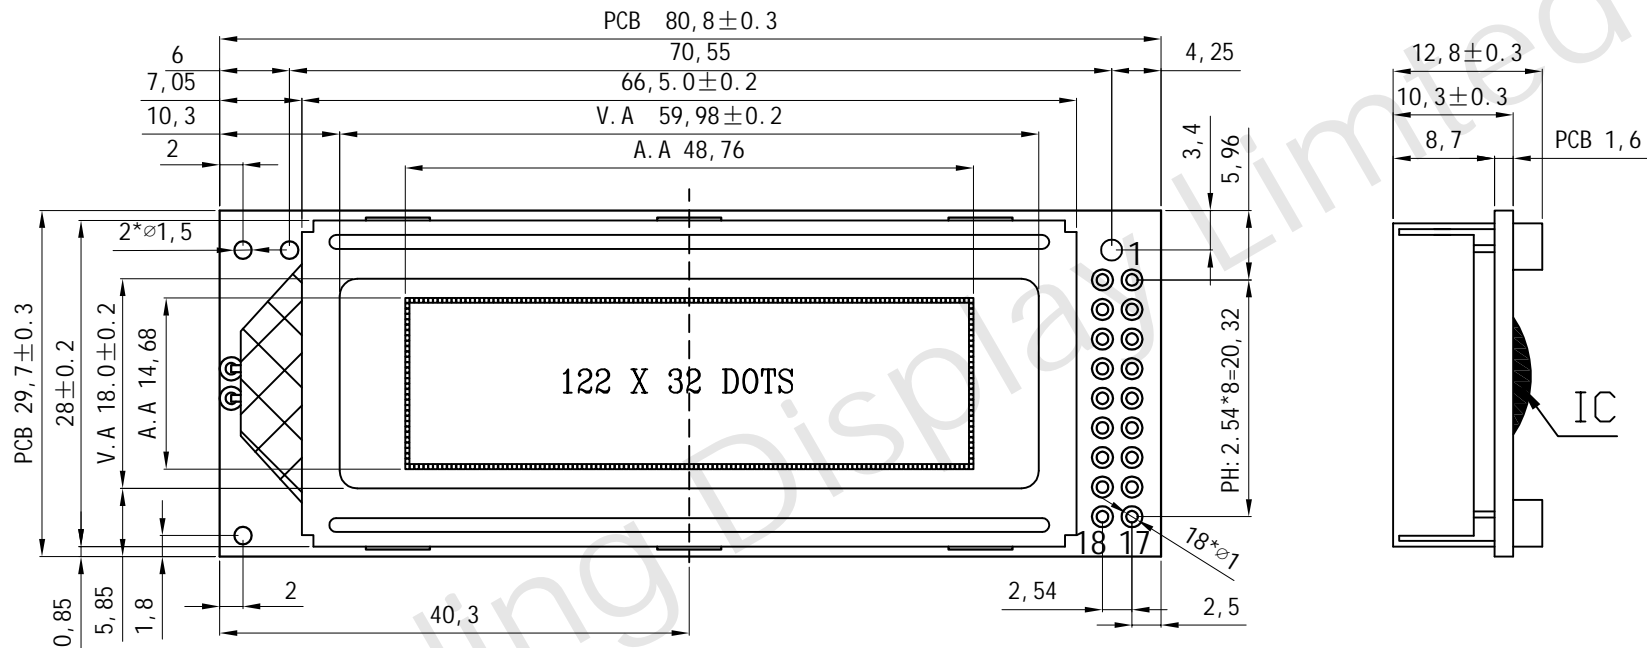

**SPECIFICATION:**

- 1). STN(blue) /NEGATIVE/TRANSMISSIVE
- 2). DUTY: 1/32. BIAS: 1/5. VOP=5.0V
- 3). VIEWING ANGLE: 6 O' CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C  
STORAGE TEMPERATURE: -30~80°C
- 5). BACKLIGHT: white I=20MA
- 6). DRIVE IC: SBN1661G
- 7). DRIVE POWER: VDD=5.0V

 <b>深圳市华显晶显示技术有限公司</b> <b>HUA XIAN JING Display Limited</b>		UNITS: mm    DATE: 2014/11/15 MODE NUMBER : HSM12232C-2		 SHEET: 1 Of 1 DATE: 2014/11/15	
Unspecified Tolerance: ± 0.20	DESIGN BY: WZQ	CHECKED BY:	CUSTOM NO:	DO NOT SCALE THIS DRAWING.	