


INTERFACE	
1	/VLED
2	VSS
3	VDD(5V)
4	VO
5	A0
6	E1
7	E2
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6
15	DB7
16	R/W

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2017/2/10

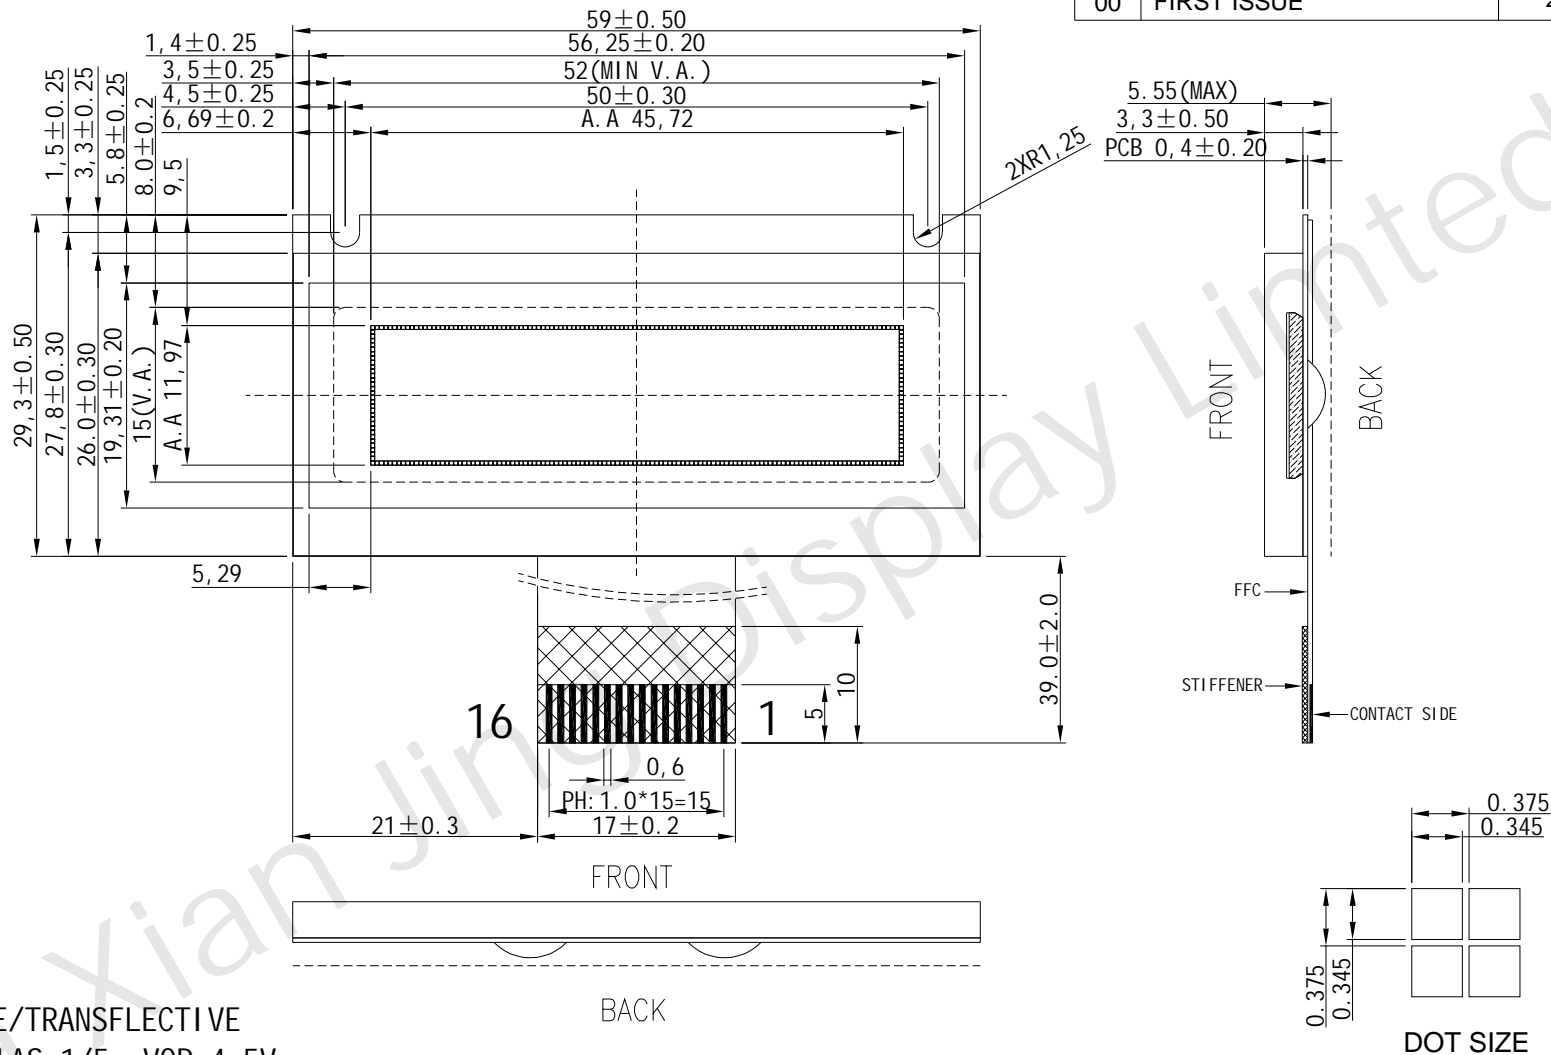

**SPECIFICATION:**

- 1). FSTN/POSITIVE/TRANSFLECTIVE
- 2). DUTY: 1/32. BIAS: 1/5. VOP=4.5V
- 3). VIEWING ANGLE: 6 O' CLOCK
- 4). OPERATING TEMPERATURE:  $-20 \sim 70^{\circ}\text{C}$   
STORAGE TEMPERATURE:  $-30 \sim 80^{\circ}\text{C}$
- 5). BACKLIGHT: BLUE I=40MA
- 6). DRIVE IC: AIP31520
- 7). DRIVE POWER: VDD=5.0V



深圳市华显晶显示技术有限公司

HUA XIAN JING Display Limited

www.huaxianjing.com

Unspecified Tolerance:	$\pm 0.20$	UNITS: mm	DATE:	MODE NUMBER :		SHEET:	1 Of 1
DESIGN BY:	WZQ	2017/2/10	HSM12232M	DATE:		2017/2/10	
CHECKED BY:				DO NOT SCALE THIS DRAWING.	PROJECTION		
CUSTOM NO:							