




IF	SOMBLE
1	VDD(5V)
2	VSS
3	V0
4	DB0
5	DB1
6	DB2
7	DB3
8	DB4
9	DB5
10	DB6
11	DB7
12	CSA
13	CSB
14	RST
15	R/W
16	RS
17	E
18	VOUT
19	LED-A(5V)
20	LED-K

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2013-7-10

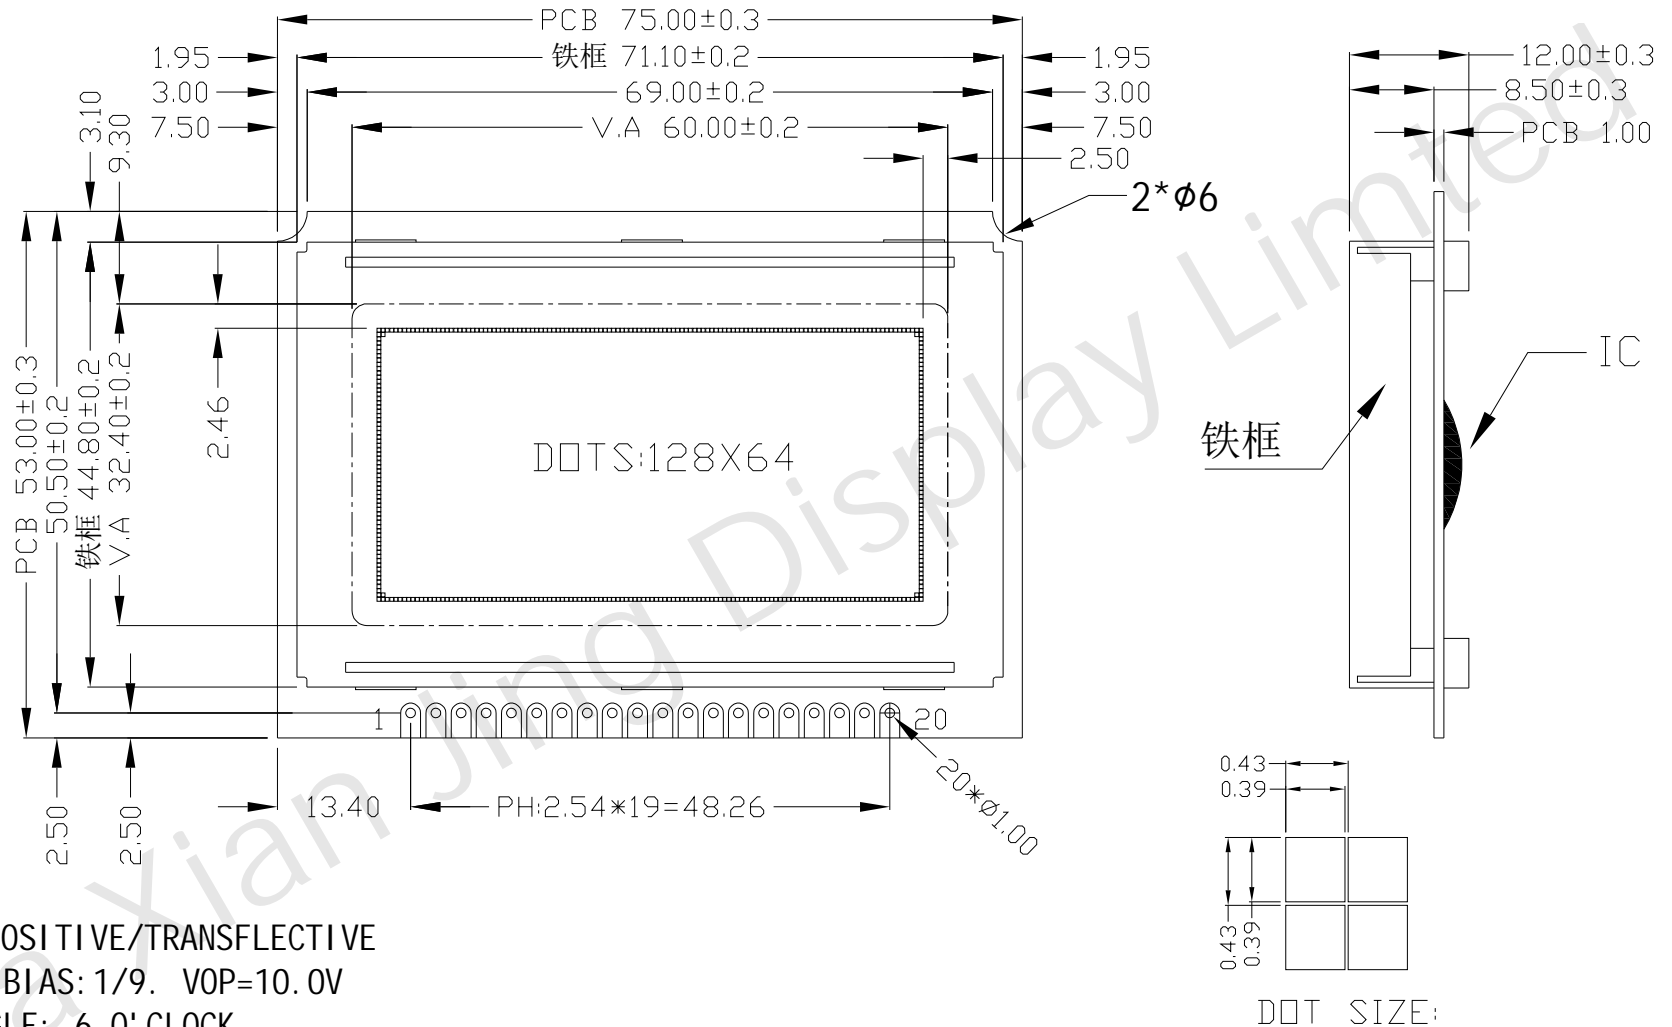

SPECIFICATION:

- 1). STN(GRAY)/POSITIVE/TRANSFLECTIVE
- 2). DUTY: 1/64. BIAS: 1/9. VOP=10.0V
- 3). VIEWING ANGLE: 6 O' CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 6). BACKLIGHT: WHITE I=80MA
- 7). DRIVE IC: 0107, 0108

		深圳市华显晶显示技术有限公司 HUA XIAN JING Display Limited		www.huaxianjing.com		
						MODE NUMBER : HSM12864A-19
Unspecified Tolerance:	±0.20	UNITS: mm	DATE:		SHEET:	1 Of 1
DESIGN BY:	WZQ	2013/7/10			DATE:	2013/7/10
CHECKED BY:					DO NOT SCALE THIS DRAWING.	
CUSTOM NO:				PROJECTION		