


INTERFACE	
1	VDD(5V)
2	VSS
3	V0
4	DB0
5	DB1
6	DB2
7	DB3
8	DB4
9	DB5
10	DB6
11	DB7
12	/CS1
13	/CS2
14	/RST
15	R/W
16	D/I
17	E
18	VEE
19	LED-A(5V)
20	LED-K

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2017-2-23

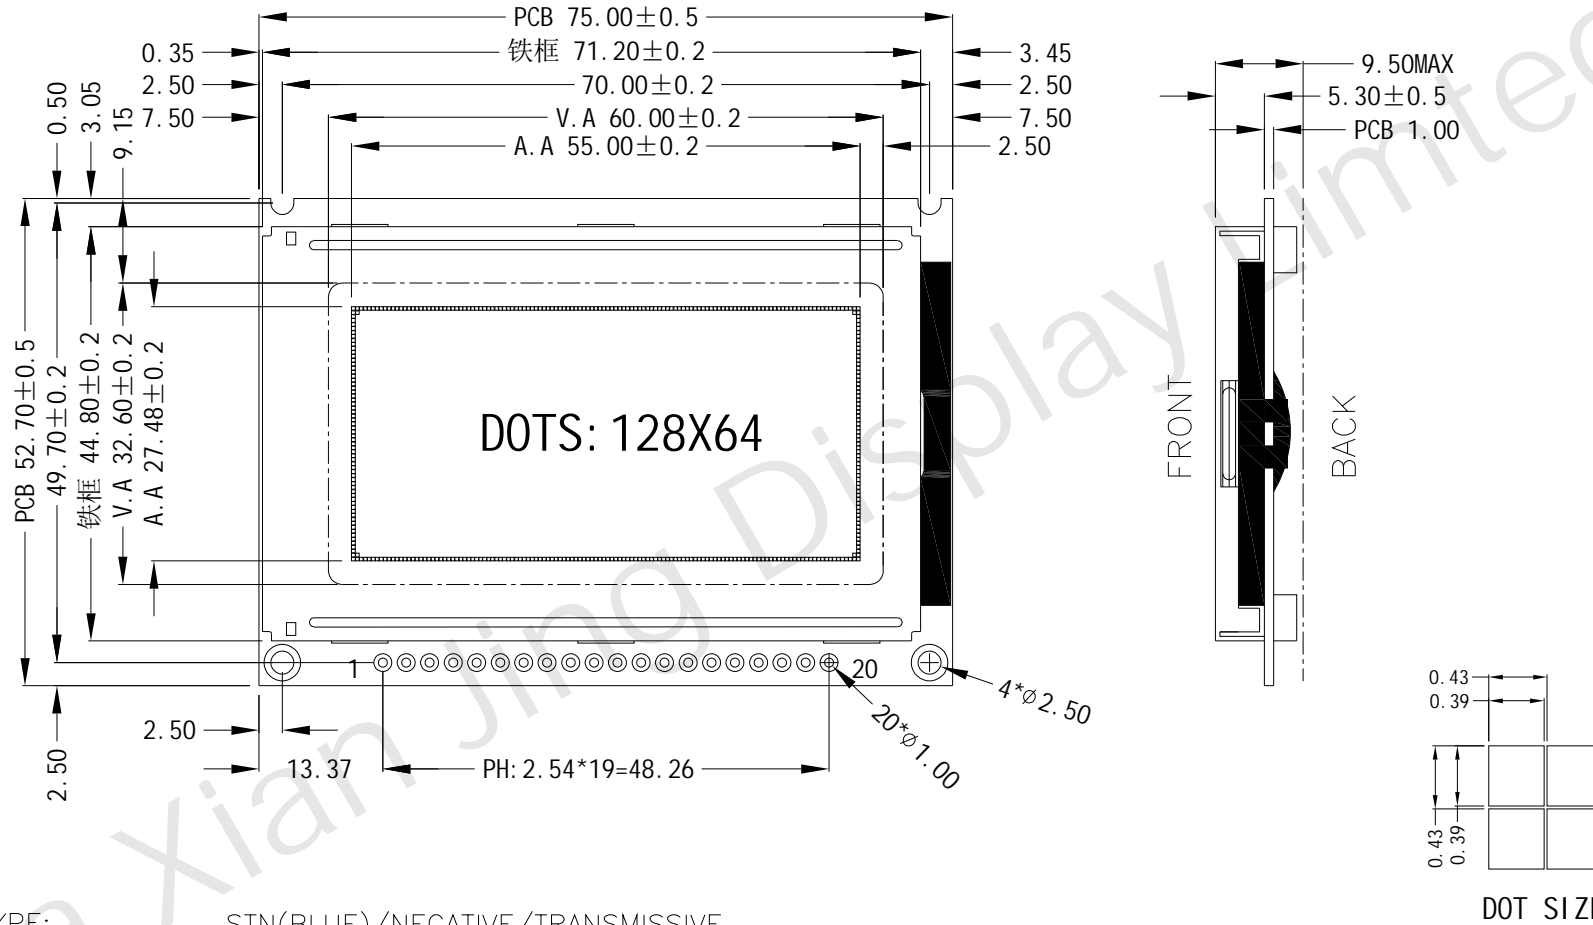

NOTES:

- |                            |                                 |
|----------------------------|---------------------------------|
| 01. DISPLAY TYPE:          | STN(BLUE)/NEGATIVE/TRANSMISSIVE |
| 02. OPERATING VOLTAGE:     | VOP=9.0V,VDD=5.0V               |
| 03. OPERATING TEMPERATURE: | -20°C~+70°C                     |
| 04. STORAGE TEMPERATURE:   | -30°C~+80°C                     |
| 05. DRIVE MODE:            | 1/64DUTY,1/9BIAS                |
| 06. VIEWING DIRECTION:     | 6:00                            |
| 07. DRIVE IC:              | AIP31107/31108                  |
| 08. CONNECTOR:             | ZEBER                           |
| 09. BACKLIGHT:             | LED(WHITE)                      |
| 10. CUSTOMER'S PART ID:    |                                 |

 <b>深圳市华显晶显示技术有限公司</b> <b>HUA XIAN JING Display Limited</b>		www.huaxianjing.com			
				Unspecified Tolerance: ±0.20	UNITS: mm
DESIGN BY: WZQ	CHECKED BY:	CUSTOM NO:	DO NOT SCALE THIS DRAWING.		SHEET: 1 Of 1
				DATE: 2017/2/23	