


INTERFACE	
1	VSS
2	VDD
3	V0
4	VEE
5	RS
6	R/W
7	E
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6
15	DB7
16	/CS1(L)
17	/CS2(L)
18	/CS3(L)
19	/RST

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2016/6/14

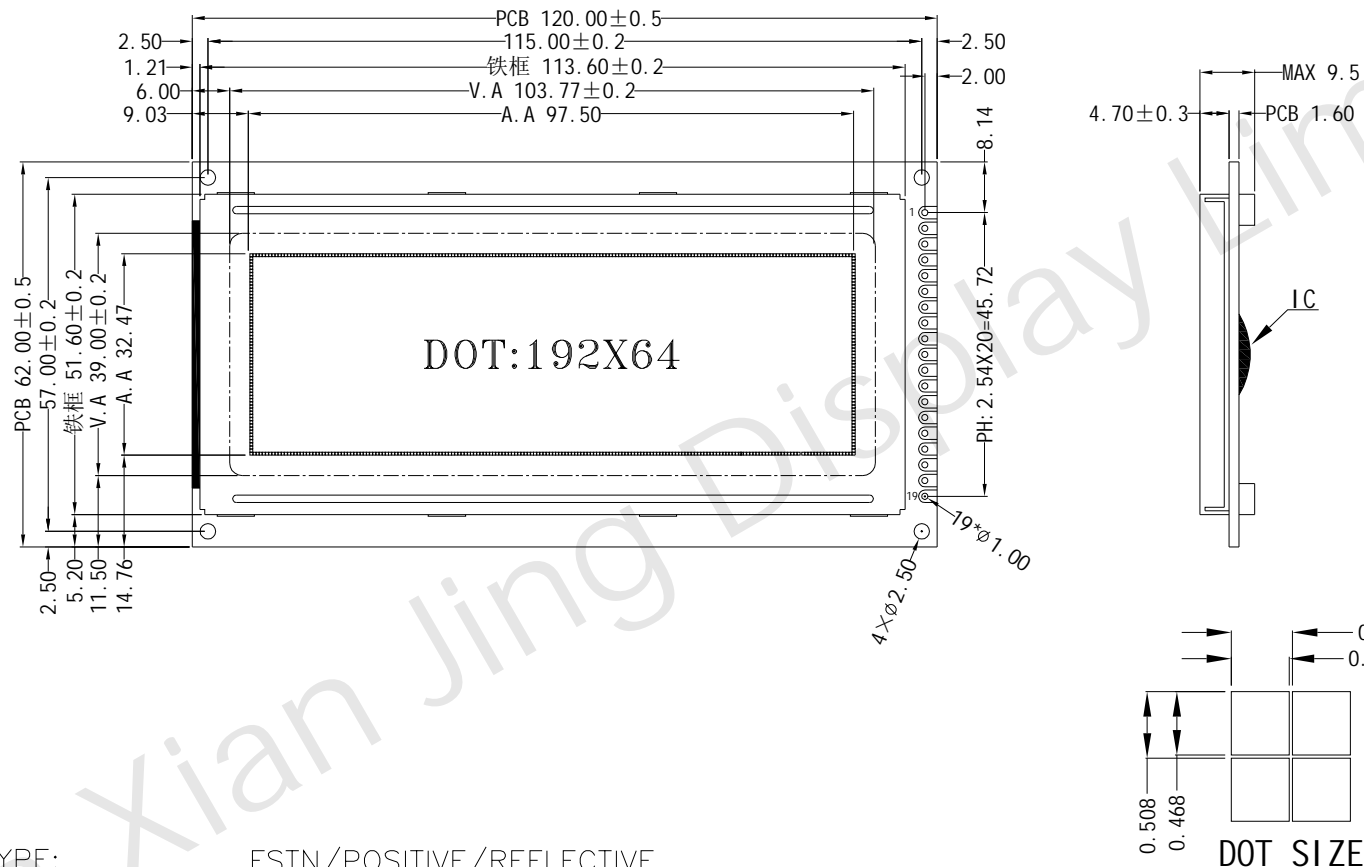

NOTES:

- |                            |                          |
|----------------------------|--------------------------|
| 01. DISPLAY TYPE:          | FSTN/POSITIVE/REFLECTIVE |
| 02. OPERATING VOLTAGE:     | VOP= 10.5V,VDD= 3.3-5.0V |
| 03. OPERATING TEMPERATURE: | -20°C~+70°C              |
| 04. STORAGE TEMPERATURE:   | -30°C~+80°C              |
| 05. DRIVE MODE:            | 1/64DUTY,1/9BIAS         |
| 06. VIEWING DIRECTION:     | 6:00                     |
| 07. DRIVE IC:              | NT7107,NT7108            |
| 08. CONNECTOR:             | ZEBER                    |
| 09. BACKLIGHT:             | -----                    |
| 10. CUSTOMER'S PART ID:    |                          |

 <b>深圳市华显晶显示技术有限公司</b> <b>HUA XIAN JING Display Limited</b>		<a href="http://www.huaxianjing.com">www.huaxianjing.com</a>	
DESIGN BY: WZQ	DATE: 2016/6/14	 PROJECTION	SHEET: 1 Of 1
CHECKED BY:			DATE: 2016/6/14
CUSTOM NO:		DO NOT SCALE THIS DRAWING.	