


| INTERFACE | | | |
|-----------|---------|-------|---------|
| J1/J4 | | J2/J3 | |
| 1 | VSS | 1 | FG |
| 2 | VDD(5V) | 2 | V0 |
| 3 | V0 | 3 | VEE |
| 4 | /WR | 4 | VSS |
| 5 | /RD | 5 | VDD(5V) |
| 6 | /CS | 6 | CP |
| 7 | A0 | 7 | LP |
| 8 | /RES | 8 | M |
| 9 | DB0 | 9 | FLM |
| 10 | DB1 | 10 | DIS |
| 11 | DB2 | 11 | D3 |
| 12 | DB3 | 12 | D2 |
| 13 | DB4 | 13 | D1 |
| 14 | DB5 | 14 | D0 |
| 15 | DB6 | 15 | LEDA |
| 16 | DB7 | 16 | LEDK |
| 17 | LEDA | | |
| 18 | VEE | | |
| 19 | LEDA | | |
| 20 | LEDK | | |


| VER | DETIAL DISCRPTION | DATE |
|-----|-------------------|-----------|
| 00 | FIRST ISSUE | 2013-1-28 |

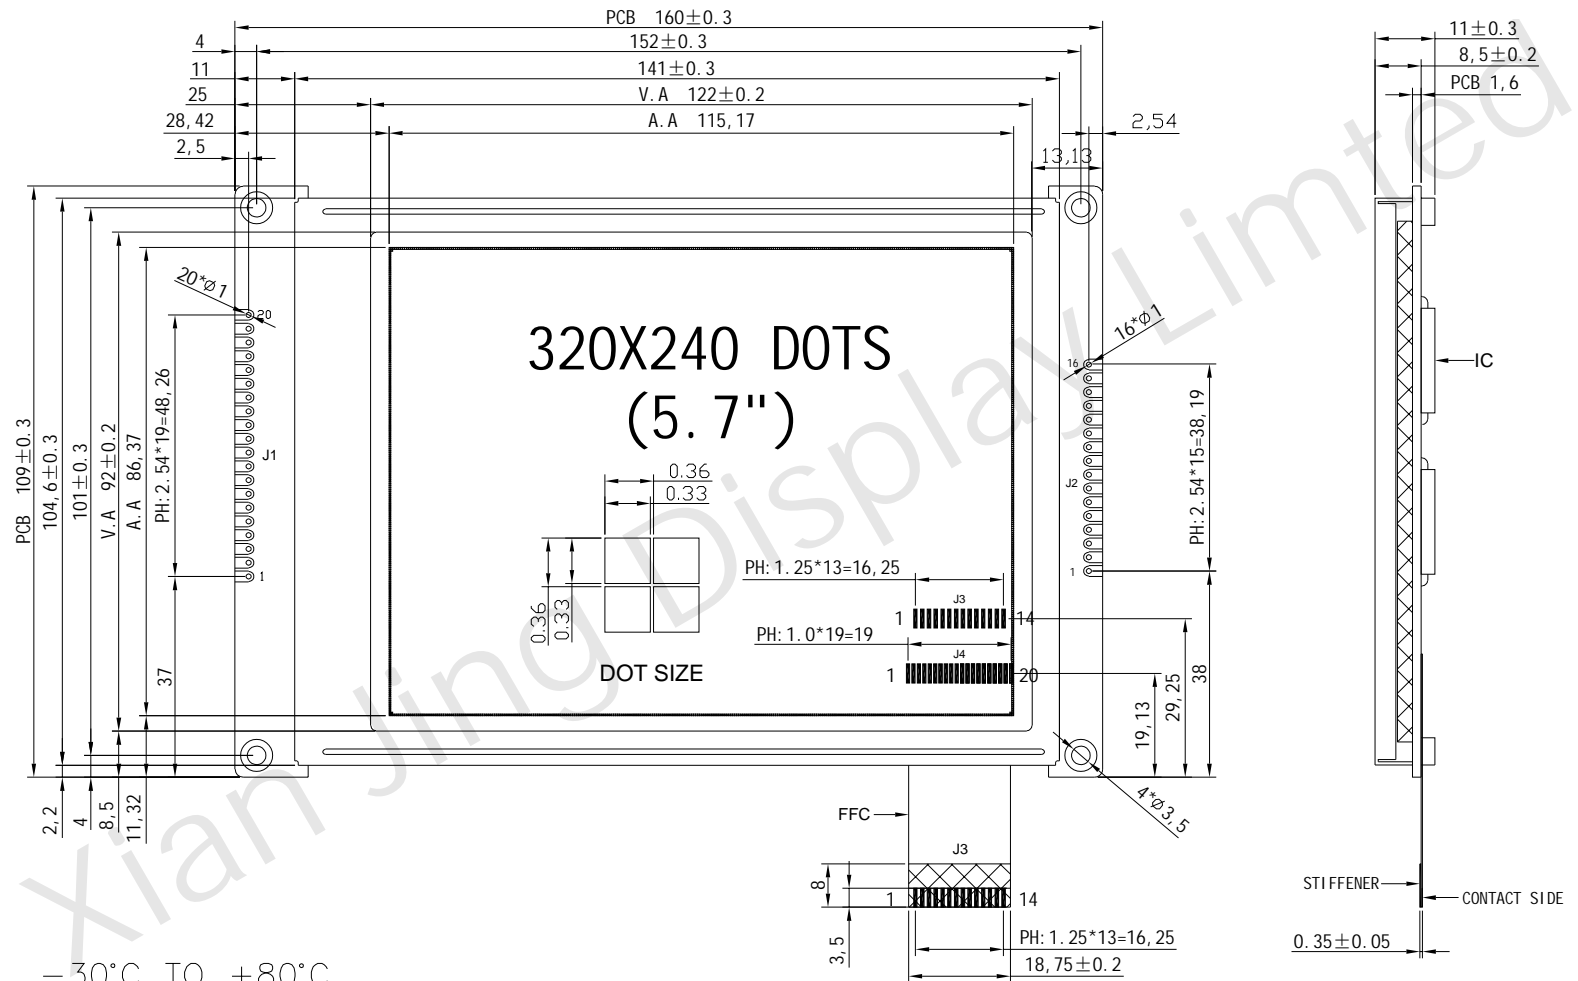

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/240 DUTY, 1/17 BIAS,VOP=23V
 DISPLAY MODE : STN TRANSMISSIVE NEGATIVE(BLUE)
 BACK LIGHT ITEM: WHITE,I=160mA
 LCM OPERATING VOLTAGE: 5.0V
 CONTROLLER/DRIVER IC: RA8835

 深圳市华显晶显示技术有限公司
 HUA XIAN JING Display Limited www.huaxianjing.com

| | | | | | | | |
|------------------------|-------|-----------|------------|----------------------------|---|-----------|--------|
| Unspecified Tolerance: | ±0.20 | UNITS: mm | DATE: | MODE NUMBER : |  | SHEET: | 1 Of 1 |
| DESIGN BY: | WZQ | 2013/1/28 | HSM320240B | DATE: | | 2013/1/28 | |
| CHECKED BY: | | | | DO NOT SCALE THIS DRAWING. | PROJECTION | | |
| CUSTOM NO: | | | | | | | |