




客户确认
(修改意见)

版本	修改日期	修改人	修改内容
V02			
V03			

正视图

侧视图

背视图

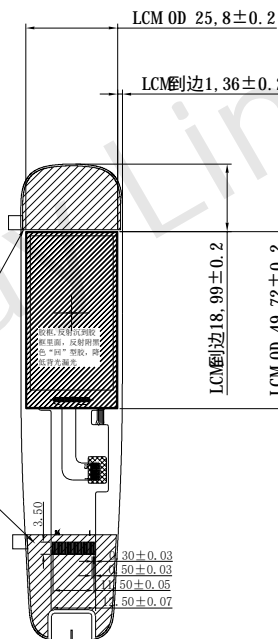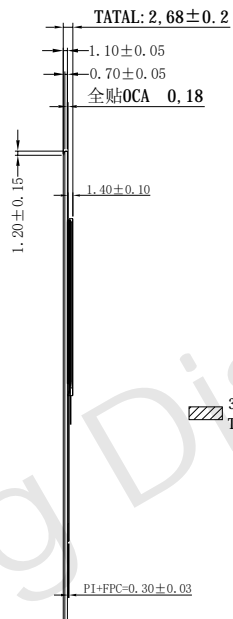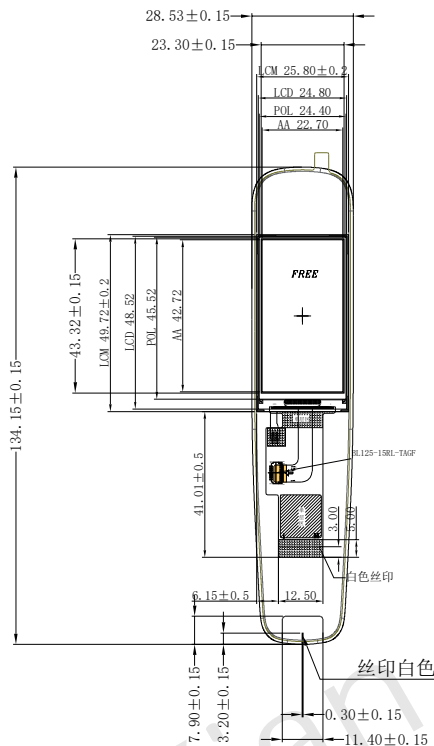

3M495 300LSE
T=0.175mm 带撕手位

LCM 4spi	
PIN	DESCRIPTION
1	(SPI_RST)
2	(SPI_SCL)
3	(SPI_D/C)
4	(SPI_CS)
5	VDD(2.8V)
6	VDDI(2.8V)
7	SPI_SDA
8	GND
9	LED_K
10	LED_A
11	GND
12	NC
13	S2
14	S3
15	S4
16	S5
17	S6
18	S7
19	S8
20	S9
21	S10
22	S11
23	S12
24	S13

CTP	
PIN	DESCRIPTION
1	NC
2	S2
3	S3
4	S4
5	S5
6	S6
7	S7
8	S8
9	S9
10	S10
11	S11
12	S12
13	S13
14	GND
15	NC

注意事项:

- 1、强化玻璃表面硬度>6H
- 2、油墨丝印区丝印黑色, 要求100%遮光
- 3、玻璃四周边安全边<0.15mm, 不可有白边
- 4、LENS全透效果, 透过率≥86%
- 5、符合RoHS标准
- 6、OGS厚度1.1mm 2.5D
- 7、其他未注公差±0.2mm

HUA XIAN JING Display Limited

DRAWN BY: (绘图):	TITLE: (产品编号):	TFT199BT006	VIEW: (投影方式):	
CHECKED BY: (审核):	CUSTOMER ID: (客户编号):		UNIT: (单位):	mm
APPROVED BY: (批准):	DATE: (日期):	2023. 9. 20	SCALE: (比例):	1:1
Standard tolerance: (标准公差):	VERSION NUMBER: (版本):			