




*2.15±0.15(不包含背胶及FPC)

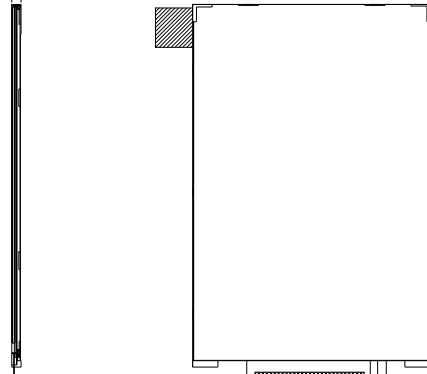

露铜接地
双面带胶导电布T=0.05mm

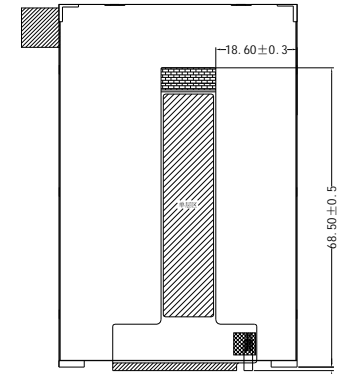

FPC弯折示意图
FPC弯折出货



BLU CIRCUIT DIAGRAM
IF=20mA VF=2.8-3.2V

PIN	DESCRIPTION
1	GND
2	GND
3	VLED+
4	VLED-
5	LCD_VDD
6	LCD_VDD
7	GND
8	LCD_TE
9	LCD_CS
10	LCD_RS
11	LCD_WR
12	LCD_RD
13	GND
14	LCD_D0
15	LCD_D1
16	LCD_D2
17	LCD_D3
18	LCD_D4
19	LCD_D5
20	LCD_D6
21	LCD_D7
22	LCD_RST
23	GND
24	GND

- 技术要求:
1. 未标注尺寸公差±0.20mm
 2. LCD切割断面崩边≤1/3 (单层LCD厚度)
 3. 平面翘曲度≤0.35mm
 4. 符合RoHS指令
 5. 工作温度: -20℃~70℃
 6. 储存温度: -30℃~80℃
 7. 建议TP V.A开窗比LCD A.A单边大0.4mm
 8. 泡棉开窗比LCD A.A单边大0.3mm

LCD型号/类型/分辨率	3.5/1IPS/320*480
视角方向	ALL
偏光片	上磨砂0° /下光90°
驱动IC	1L19488
LED颗数/连接方式/电流	6-LED/6并/120mA
背光底色要求	

REV	SIGN	DESCRIPTION	PIC	DATE
A		首次发行	KZH	2022.11.23

PART DESCRIPTION		LCM		HUA XIAN JING Display Limited www.huaxianjing.com			
DESIGNED		UNIT	SCALE	3rd ANGLE	SIZE	SHEET NUMBER	
CHECKED		mm	1.00		A4	1 of 1	
APPROVED		PART NUMBER				DRAWING REV.	
				MODEL NAME			
				TFT035B123			
				PART NUMBER VER.			
				N/A			