



主要材料表		
1	plastic housing	亚伦2800黑色
2	Light guide	HL-4002
3	FPC	华显晶
4	SMT LED	晶鑫宇
5	Diffuser film	CH50
6	Prism film(L)	LN-242
7	Prism film(U)	LM-242
8	Reflector film	HY21
9	BEZEL	镀铝锌
10	FOG	BOE

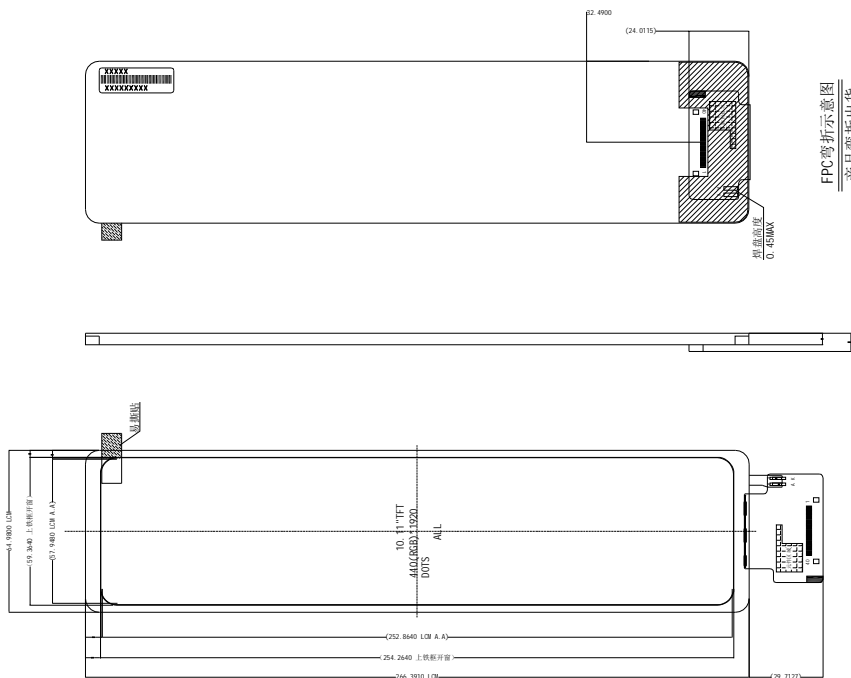

FPC弯折示意图  
产品弯折出货

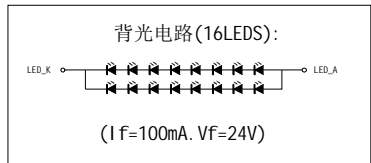

PIN	SYMBLE
1	GND
2	DOP
3	DON
4	GND
5	D1P
6	D1N
7	GND
8	CLKP
9	CLKN
10	GND
11	D2P
12	D2N
13	GND
14	D3P
15	D3N
16	GND
17	GND
18	IOVCC 1.8V
19	IOVCC 1.8V
20	NC
21	NC
22	NC
23	NC
24	RESET
25	NC
26	NC
27	GND
28	LEDK
29	LEDK
30	GND
31	NC
32	GND
33	GND
34	NC
35	LEDA
36	LEDA
37	GND
38	VCI 3.3V
39	VCI 3.3V
40	NC

- NOTES:
- Display: 10.11" TFT
  - VIEWING DIRECTION : ALL
  - Driver IC: ICNL9707 ; LCD:
  - POL: 上XX(T=XX) 下XX(T=XX)
  - STORAGE TEMPERATURE: -20° C TO 70° C, OPERATING TEMPERATURE: -10° C TO 60° C;
  - BL LED: 16 LEDs, If=100mA; Vf=24V±2.4V, LCM Brightness: XXcd/m2(min), Chromaticity: X=0.30±0.03, Y=0.31±0.03, UNIFORMITY: 80%(min)
  - \* CRITICAL DIMENSUON; ( ): REF DIMENSION
  - GENERAL TOLERANCE: ±0.2mm;
  - LCD warp is ≤ 0.3;
  - FPC 基材采用1/3 盎司无胶电解铜
  - ROHS

REV	SIGN	DESCRIPTION	PIC	DATE
A		首次发行	XW	2021. 12. 20

PART DESCRIPTION	LCM		HUA XIAN JING Display Limited www.huaxianjing.com			
DESIGNED			UNIT mm	SCALE 1.00	3rd ANGLE	SHEET NUMBER 1 of 1
CHECKED			PART NUMBER			DRAWING REV. A
APPROVED			MODEL NAME TFT101B001			PART NUMBER VER. N/A